

# **FBackup**

Take full control of your backup

## **FBackup User Manual**

Copyright © 2011 Softland

# FBackup User Manual

for FBackup version 4

---

*by Softland*

*This documentation contains proprietary information of Softland.*

*All rights reserved. No part of this documentation shall be reproduced, stored in a retrieval system or transmitted by any means, electronic, mechanical, photocopying, recoding, or otherwise, without permission from Softland. No patent liability is assumed with respect to the use of the information contained herein.*

*The information in this document is subject to change without notice. Although every precaution has been taken in the preparation of this book, Softland assumes no responsibility for errors and omissions. Nor is any liability assumed for damages resulting from the information contained herein.*

*Windows ® is a registered trademark of the Microsoft Corporation. All other products or company names in this document are used for identification purposes only, and may be trademarks of their respective owners.*


# Table of Contents

<b>Part I Introduction</b>	<b>6</b>
1 Product Description.....	6
2 System Requirements.....	7
<b>Part II Getting Started</b>	<b>9</b>
1 How to Configure a New Backup?.....	9
2 How to Run a Backup Job?.....	10
3 How to Manage Backup Jobs?.....	11
4 How to Restore from a Backup?.....	11
5 How to Password Protect a Backup?.....	12
6 How to Schedule a Backup?.....	12
7 How to Backup to USB or Firewire drives? .....	13
<b>Part III Backup Types</b>	<b>16</b>
1 Backup Types.....	16
<b>Part IV Main Window</b>	<b>18</b>
1 Commands.....	18
2 Getting Started.....	20
3 Backup List.....	21
4 Create Shortcut.....	22
5 Plugins .....	24
6 Keyboard Shortcuts.....	25
<b>Part V New Backup Wizard</b>	<b>27</b>
1 Overview.....	27
2 Name and destination.....	27
Local .....	28
Network .....	29
3 What do you want to backup?.....	30
4 How do you want to backup?.....	31
5 When do you want to backup? .....	32
<b>Part VI Backup Properties</b>	<b>35</b>
1 Overview.....	35
2 General .....	35
3 Destination.....	36

Local hard drive .....	37
External hard drive .....	38
Removable .....	38
Network .....	40
<b>4 Sources .....</b>	<b>41</b>
<b>5 Filters .....</b>	<b>42</b>
<b>6 Type .....</b>	<b>43</b>
Full .....	44
Mirror .....	44
<b>7 Compression.....</b>	<b>46</b>
<b>8 Advanced.....</b>	<b>47</b>
<b>9 Scheduler.....</b>	<b>48</b>
Scheduler Properties .....	50
<b>Part VII Restore Wizard .....</b>	<b>54</b>
1 Where and how to restore.....	54
2 What do you want to restore.....	55
3 Do you want to filter the files.....	56
<b>Part VIII File Filtering .....</b>	<b>59</b>
1 Overview.....	59
2 File Filter.....	59
<b>Part IX Options .....</b>	<b>62</b>
1 General .....	62
2 Startup .....	62
3 Updates .....	64
<b>Part X Help .....</b>	<b>66</b>
1 Check for Updates.....	66
2 About .....	66
<b>Index .....</b>	<b>67</b>

# Introduction


## Part

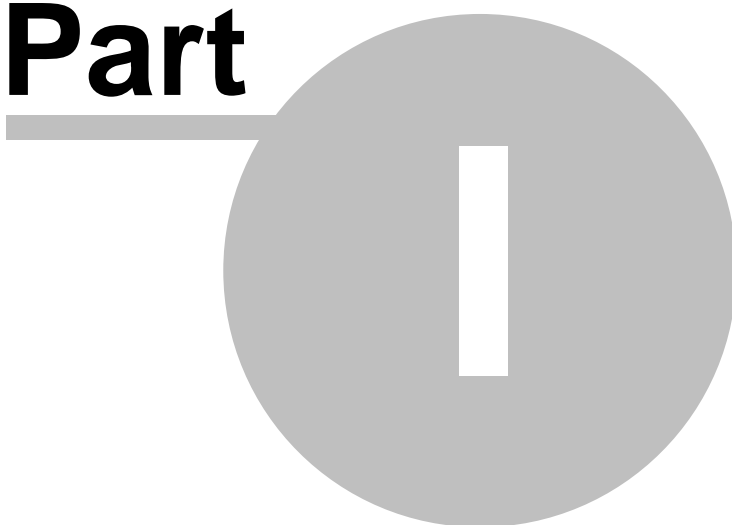

# 1 Introduction

## 1.1 Product Description

FBackup is an award-winning backup software for Windows. FBackup protects your valuable data from partial or total loss by automating backup tasks, password protecting and compressing it to save storage space. Using FBackup you can easily backup to any local, network drive, or other removable media (such as USB or Firewire drives).

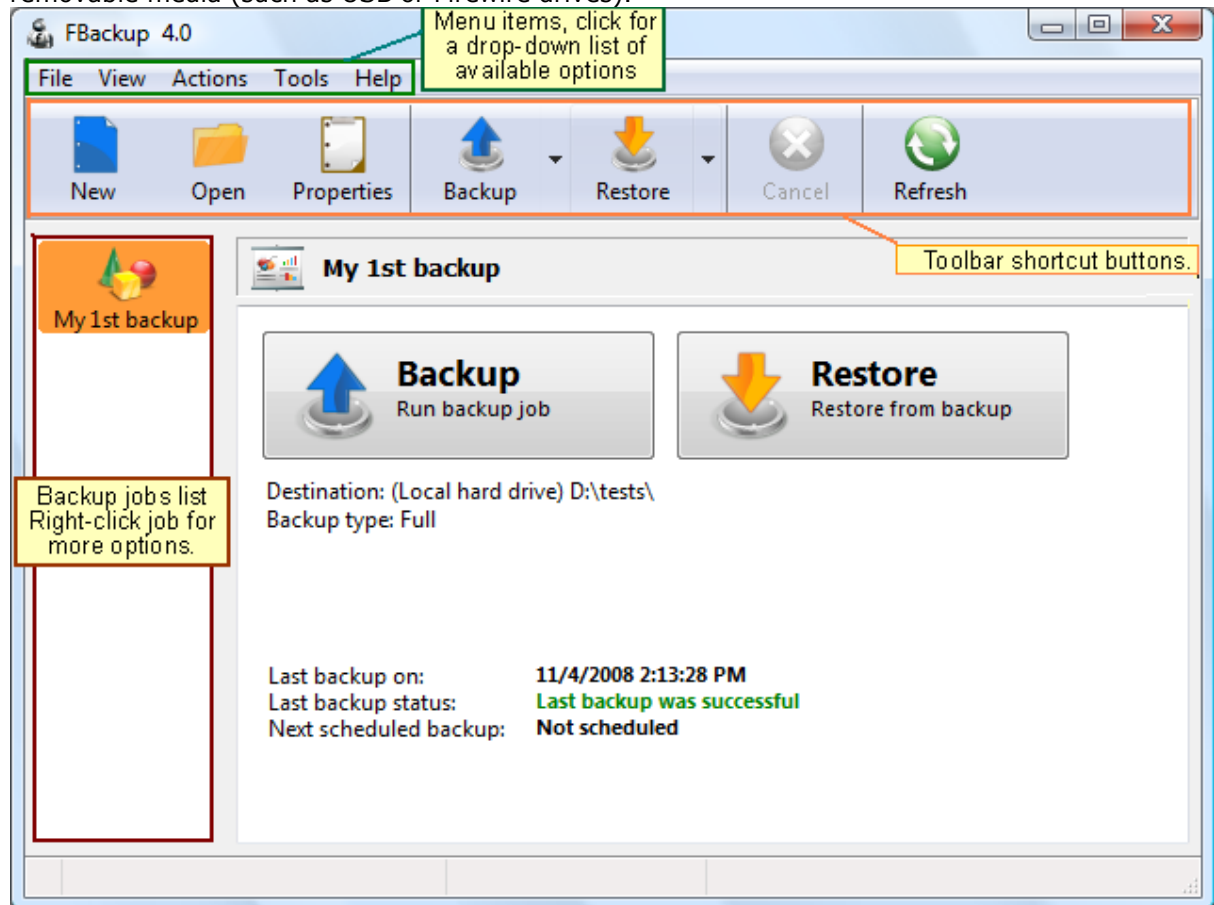

FBackup can backup open/locked files (if the files are located on local partitions on Windows XP/2003/Vista/Windows 7) and it can perform full and mirror backups. When defining a backup you can also set file filters and schedule the backup for automatic execution.

There is also the option to run predefined backups, such as My Documents, My Pictures, Internet Explorer Favorites, Mozilla Firefox Profiles, Mozilla Thunderbird or Outlook Express emails and settings.

FBackup has ZIP64 support (can create backups over 2 GB) and creates standard zip files, meaning that you can access it with any zip compatible utility.

FBackup keeps track of file versions. You can easily restore any version of files or a whole folder. You can filter files to be restored.

FBackup tests the backup files automatically to ensure the backup is safe and correctly executed (uses CRC32).

FBackup works with any drive letter, including mapped network drives and UNC paths. FBackup runs on Windows 2000 Server/2003/XP/Vista/Windows 7/Windows 2008 both 32-bit/64-bit and offers multi language support.

## 1.2 System Requirements

To install FBackup you need Windows 2000/XP/Server 2003/Vista/Windows 7 or Windows 2008 and at least 50 megabytes of free disk space. Installing additional language files may increase the space requirements.


Because the application uses zip compression, additional disk space is needed for the temporary directory. The amount of free space depends on the size of files to backup.

Note: FBackup can backup open files only if installed on Windows XP, Windows 2003 Server, Windows Vista, Windows 7 or Windows 2008 and if the files are on NTFS partitions. FBackup works on Windows 2000 too but this feature will not be available on these systems.

# Getting Started

# Part


---

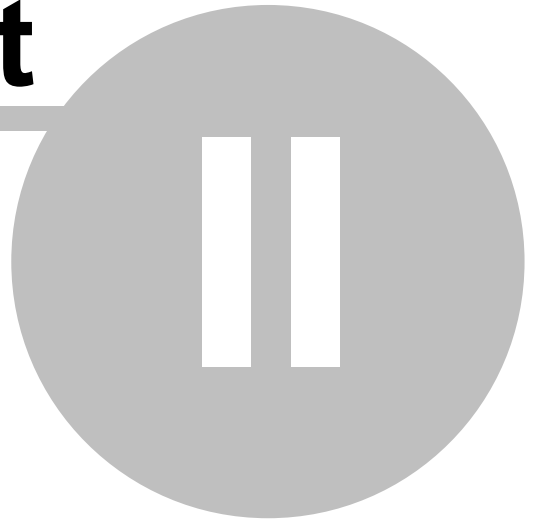



## 2 Getting Started


### 2.1 How to Configure a New Backup?

To create a new backup job, click on the **New Backup Wizard** toolbar button (  ). For each backup job you must specify at least its name, a valid storage destination and the source files (first two steps of this wizard), the rest of the options not being mandatory. In **New Backup Wizard**, you can switch anytime to **Advanced mode** for more configuration options.


These are the steps you must perform in the **New Backup Wizard**:

- 1) Enter the name of the backup in the **Backup name** field and select a location where you want to save the backup. You can choose as destination:
  - your local hard drive (**Local**)
  - a network computer (**LAN**)

Click **Next** to go to the following step.

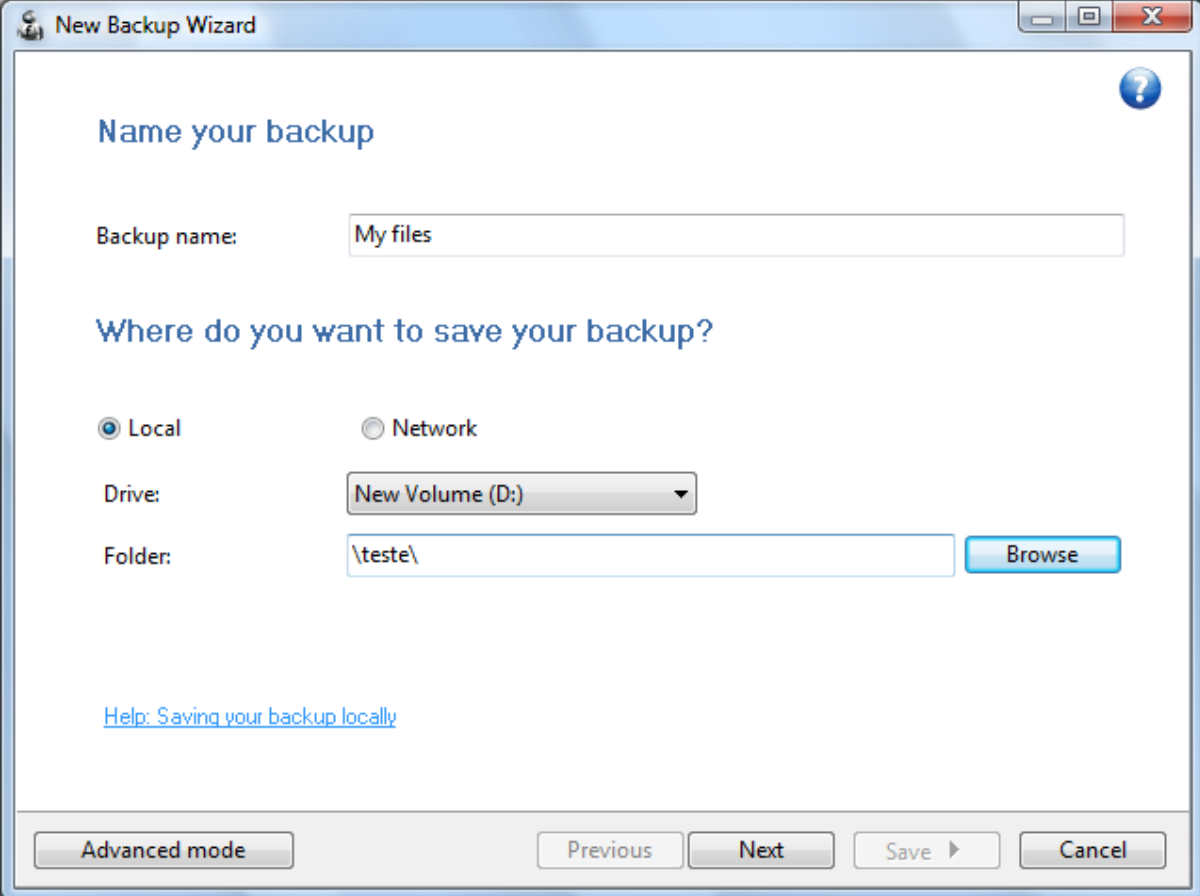

- 2) Select the files and folders you want to backup (sources of the backup) or choose a predefined backup from the drop down list and click **Next**.

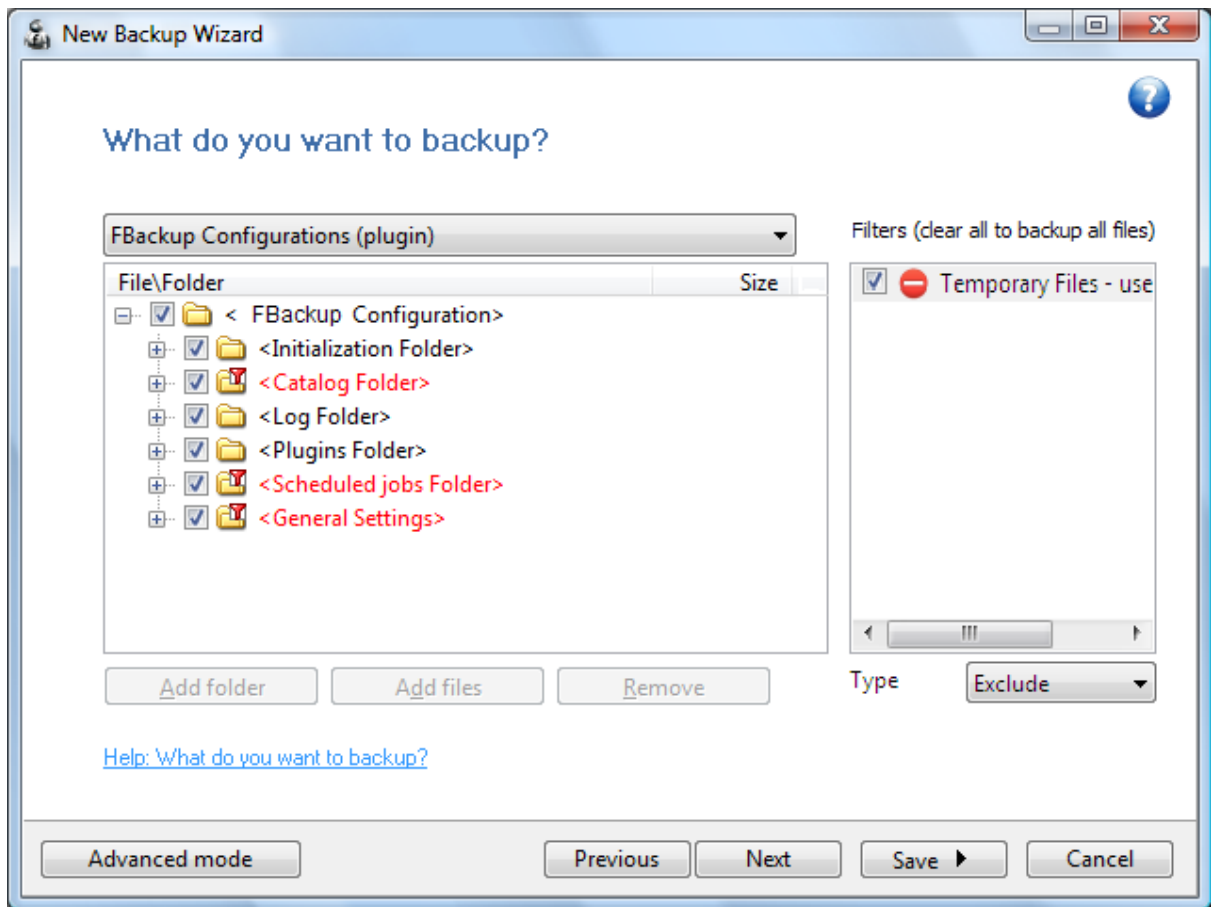

3) Select how do you want to backup. You can also use encryption for the backup types that creates zip files.

## 2.2 How to Run a Backup Job?

To start a backup click the **Backup** button (  ) from the application's toolbar or press F6.

During the execution of the backup, you will see a **Backup** image appear in front of the icon chosen for the backup job. If the backup is finished successfully (without errors and warnings) this image will disappear restoring the initial view of the backup jobs' icon.



If one or more files could not be backed up (not enough user rights etc.), then the **Warning** icon appears in front of the default backup job icon, after the backup finished. Read the log files (from **View->Job Logs->Last Backup log**) for details about the files that were not backed up. The **Warning** icon will disappear when the backup is executed again and all files were backed up.



If an error occurred during backup and the backup was aborted, the **Error** icon appears in front of the backup job. Read the log files (from **View->Job Logs->Last Backup log**) for details about the errors. The icon will disappear when the backup is executed again and the execution is successful.




## 2.3 How to Manage Backup Jobs?

### Copy an Existing Backup Configuration

You can use the **Create Like** (Ctrl+L) option from the **File** menu to create a duplicate of the selected backup job and after that you can easily modify its configuration. This option can also be selected from the right-click menu of the backup job.

### Modify a Backup Job Configuration

First you must select the backup job you wish to modify. Then press the **Properties** button (  ) from the application's toolbar. This will open the **Backup Properties** window. You can also change its configuration by choosing **Properties** from the right-click menu of the backup job. After the **Properties** window is opened, go to the page with the settings you want to modify.


### Delete a Backup Job


Select the backup job you want to delete and select **Delete Backup** option from the **File** menu. Another possibility is to choose **Delete** from the right-click menu of the backup job. Files and folders from the source and destination will not be deleted, by any of these operations.

## 2.4 How to Restore from a Backup?

With FBackup you can do the following restore operations:

- restore the latest version of all files
- filtered restore
- restore the latest version of a particular file
- restore the latest version of multiple selected files

To make a full or a filtered restore start the **Restore Wizard** by pressing the **Restore** button (  ) from the application's toolbar. You can restore to the original location or to a different location of your choice.

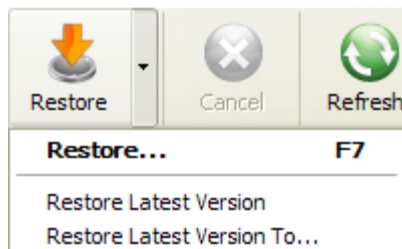

Beside files, folder information is also added to backup, so a restore process can recreate the original folder structure.

## 2.5 How to Password Protect a Backup?

Passwords are used to protect your backup files from unauthorized access.

### Setting the Password

The **Encryption Settings** window is shown in the **Compression** page under the **Type** section of the **Backup Properties** window or in the **New Backup Wizard**.

By default the **No encryption** option is selected.

The **Zip(2) compatible encryption** is compatible with all third party zip applications.

When choosing a password, it is recommended that you use a combination of letters and numbers and at least a 6 character long password.

You should manually enter the password in the **New password** field and re-enter it in the **Confirm new password** field to avoid typing errors.

The **Old password** field is enabled only when the backup job already has a password. You can change the password only if you enter the old one in this field.

This way only the owner of the backup will be allowed to change the password.

The system makes it possible to set different passwords for the same backup job, so the backup may contain zip files with different passwords. FBackup does not store passwords. Make sure that you remember all passwords that have been used for a backup job, or you will not be able to restore your files.

### How to Remove the Password?

In the **Backup Properties->Compression** page, go to **Encrypt the zip file** section, select the **No Encryption** option and enter the password that you used in the **Old password** field. You cannot remove the password if you don't provide the old one.


### Using Passwords when Restoring


During the restore process of backups with password protection, the **Enter Password** dialog will appear. Enter the password and press **OK**. If you do not know the password for this backup number you can:

- press **Skip backup** to go to the next archive - the restore may be incomplete in this case.
- press **Stop restore** to stop the whole process - the restore will be incomplete, because only a part of the files were restored.

## 2.6 How to Schedule a Backup?

You can schedule a backup from the **Backup Properties** window.

Open the **Backup Properties** window by pressing the **Properties** button (  ) from the application's toolbar and go to **Scheduler** page.

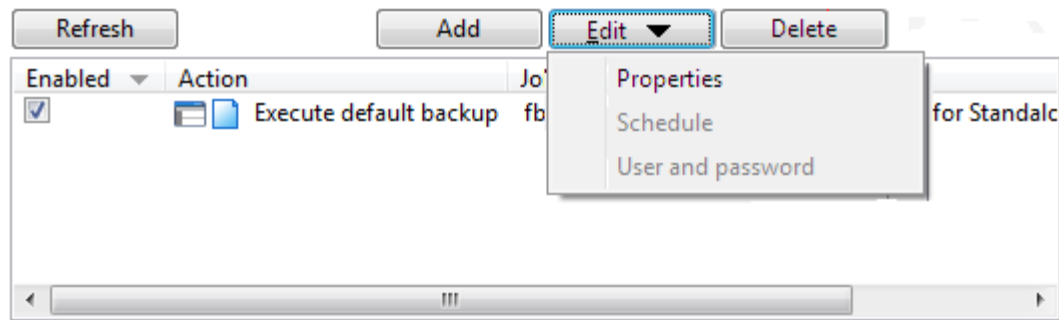

In order to add a new scheduled backup press the **Add** button and select the needed configuration in the newly opened window.

After defining the scheduled backup you must set its run time by pressing the **Schedule** button. If you skip this step the default Windows value will be used (usually is Daily at 9:00 am).

The scheduled backup jobs can be easily recognized because they have the clock icon displayed



over the job's icon.

## 2.7 How to Backup to USB or Firewire drives?

You can backup your data to an USB or Firewire drive and from an USB or Firewire drive using FBackup. This is a practical backup destination as it allows you to store important files to external devices, offering increased portability. It can be considered as an additional protection against data loss as the result of hardware failure or other disasters.

There are external USB hard drives with performance comparable to conventional hard drives. These portable drives (called enclosures) are composed of devices that connect through USB on one side and to conventional hard drives on the other side. A hard drive is installed into the enclosure and then the enclosure is plugged into the computer, thus creating a normal USB backup device. Given the size of nowadays hard drives, this can be considered a mass storage device for backup purposes.

There are external hard drives that beside the USB technology use also Firewire as a connection port. On one side Firewire hard drives tend to have increased speed over USB, but on the other side USB ports are more common on computers.

### Steps in backing up to USB drive with FBackup:

1) **Start your USB device.** Before starting the backup process make sure that the USB drive is started and working. Usually the enclosure should have a start button and display the status of the drive using led displays. When it is started a green led should be lighted.

2) **Make sure your drive is formatted.** If you have just purchased the drive and didn't use it yet, you might have to format it (only if you didn't use it before, since formatting will erase everything from it). Formatting the USB drive in Windows Vista:

- Go to Start->Settings->Control panel->System and Maintenance->Administrative Tools->Computer Management

If you are prompted for an administrator password or confirmation, type the password or provide confirmation.

- Under **Storage** click **Disk Management**

- To format the volume with the default settings, in the **Format** dialog box, click **OK**, and then click **OK** again.


- **Test** to see if the drive is now recognized by going to **Windows Explorer** (a new drive letter should appear)

3) **Configure FBackup.** If the drive is formatted and recognized by Windows, it will be recognized by FBackup too. Now, to backup to the USB drive you should define a backup job in FBackup that has the destination set to the USB drive. To ensure this, please select the backup job you want to run, press **CTRL+P** in order to open the **Backup Properties** window and select the **USB and Firewire** page under **Destination**. Select a drive from the **External hard drive** drop down list. You can also define a new backup job and in the "Where do you want to save your backup" section, select the USB drive.

# Backup Types

## Part

---

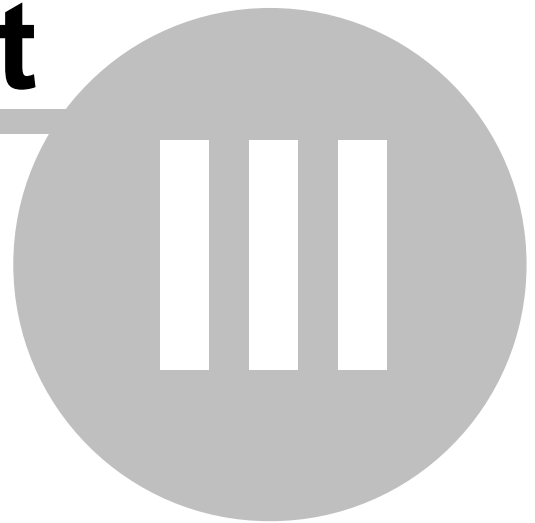

## 3 Backup Types

### 3.1 Backup Types

FBackup stores a summary snapshot of the file information into a backup catalog file (".fkc") each time a backup is executed. For every file backed up, the snapshot contains the file name, size and attributes as well as the date and time of creation, latest modification and latest access.

Legacy backup applications inspect each file's archive flag to identify which files have been changed. FBackup will not interfere with any other backup software, because it does not read or change the archive flag, it uses the catalog file to decide which files have to be backed up and which not.

#### **Full Backup**

Full backup is the starting point for all other backups and contains all the data in the folders and files that are selected to be backed up. Because full backup stores all files and folders, frequent full backups result in faster and simpler restore operations. Remember that when you choose other backup types, restore jobs may take longer.

#### **Mirror Backup**

A mirror backup is identical to a full backup, with the exception that the files are not compressed in zip files and they cannot be protected with a password. A mirror backup is most frequently used to create an exact copy of the backup data. It has the benefit that the backup files can also be readily accessed using tools like Windows Explorer.



**Main Window**

**Part**

---



**IV**

## 4 Main Window

### 4.1 Commands

#### Toolbar

The toolbar contains a selection of the most important FBackup functions.



**New** - starts the New Backup Wizard



**Open** - creates a new backup job from the opened ".fkc" or ".ini" file



**Properties** - opens a dialog to edit the backup job configuration



**Backup** - starts the backup process for the currently selected backup job. Clicking the small arrow displays the following drop-down menu:

- **Make** - performs the backup type defined in backup properties
- **Make Full** - performs a full backup regardless of the backup type



**Restore** - starts the **Restore Wizard**

- **Restore Latest Version** - restores the latest version to its original location without showing the Restore wizard
- **Restore Latest Version To** - restores the latest version to another location (prompts for one) without showing the Restore wizard




**Cancel** - cancels the backup, test or restore process



**Refresh** - reloads the backup catalog

#### Menu commands


##### **File**

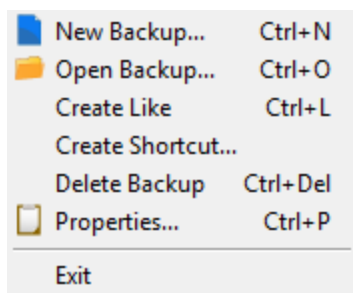

- **New Backup...** starts the **New Backup Wizard**, same as the New toolbar button or keyboard shortcut **Ctrl+N**
- **Open Backup...** creates a new backup job from the opened ".fkc" or ".ini" file, same as the **Open** toolbar button or the keyboard shortcut **Ctrl+O**
- **Open Backup From** - creates a new backup job from the opened ".fkc" or ".ini" file, and user can select to open the catalog from multiple locations as: local hard drive, network, FTP or SFTP server.
- **Create Like** duplicates the selected backup job, same as the toolbar button **Create Like** or the keyboard shortcut **Ctrl+E**
- **Create Shortcut...** creates a shortcut to a backup job (for easy backup execution from outside the program) on your desktop, quick launch or other location


- **Delete Backup** - removes the current selected backup, same as the toolbar button **Delete** or the keyboard shortcut **Ctrl+Del**
- **Properties...** opens the backup properties window, same as the toolbar button **Properties** or the keyboard shortcut **Ctrl+P**
- **Exit** - exits the application, same as the keyboard shortcut **Alt+F4**

## View

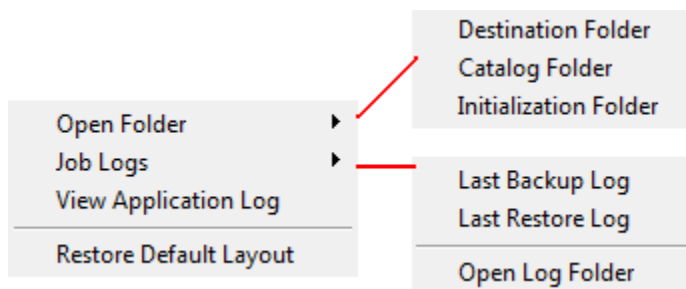

- **Open Folder** - shows list of folders that can be opened with **Windows Explorer**
  - **Destination Folder** - folder containing the destination files
  - **Catalog Folder** - folder containing the ".fkc" files
  - **Initialization Folder** - folder containing the ".ini" files
- **Job Logs** - contains a list of available logs
  - **Last Backup Log** - shows the latest backup log for the selected backup job. If there is no log file, the menu is disabled.
  - **Last Restore Log** - shows the latest restore log for the selected backup job. If there is no log file, the menu is disabled.
  - **Open Log Folder** - opens **Windows Explorer** showing the contents of the log folder
- **View Application Log** - shows the application's log file. If there is no log file, the menu is disabled.
- **Restore Default Layout** - restores FBackup's windows size, position and columns

## Actions

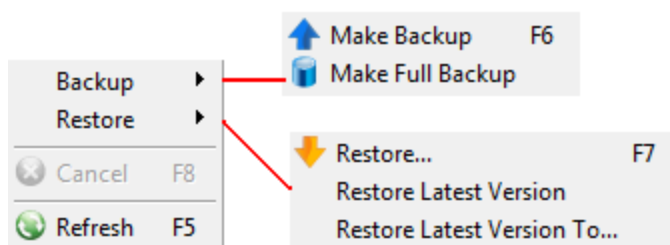

- **Backup**
  - **Make Backup** - starts the backup process for the selected backup job, same as the Backup toolbar button or keyboard shortcut F6
  - **Make Full Backup** - performs a full backup regardless of the backup type
- **Restore**
  - **Restore...** starts the Restore wizard same as the Restore toolbar button or the keyboard shortcut F7
  - **Restore Latest Version** - restores the latest version to its original location without showing the Restore wizard
  - **Restore Latest Version To...** - restores the latest version to another location (prompts for one) without showing the Restore wizard
- **Cancel (F8)** - cancels the backup, test or restore process, same as the Cancel toolbar button

- **Refresh (F5)** - reloads the backup catalog

## Tools

A screenshot of a software menu titled 'Tools'. It contains three items: 'Plugins...', 'Getting Started ...', and 'Options...'. The 'Getting Started ...' item is highlighted with a light blue background.

- **Plugins** - opens the Manage Plugins window
- **Getting Started** - opens the Getting Started window
- **Options** - opens the **Options** window

## Help

A screenshot of a software menu titled 'Help'. It contains five items: 'FBackup Help' with a keyboard shortcut 'F1', 'Visit FBackup.com', 'Visit the support forum', 'Check for Updates...', and 'About FBackup'. The 'FBackup Help' item is highlighted with a light blue background.

- **FBackup Help (F1)** - opens the help file
- **Visit FBackup.com** opens the FBackup website
- **Visit the support forum** opens the forum page
- **Check for updates** - displays a window with the available updates
- **About FBackup** - opens the About box of FBackup

## 4.2 Getting Started

This window is displayed when you first run FBackup. You can also access this window if you select **Getting Started** from the **Tools** menu.

There are two large buttons for backup and restore and a list of articles about FBackup.

### Backup

Press this button to create or run backup jobs.

#### **Create a new Backup**

Press the **New** button to start creating a new backup job using the New Backup Wizard.

#### **Run Selected Backup**

Select an existing backup job from the list and press **Backup** to run the selected job.

### Restore

#### **Open an Existing Backup**

Use the **Open** button to recreate a backup job from the backup catalog (.fkc) or from the initialization file (.ini).

The recreated backup job will be added to the backup list.


#### **Restore Selected Backup**

Select an existing backup job from the list and press **Restore** to open the Restore Wizard.

If you don't want to show the **FBackup Startup** window next time you open FBackup, uncheck the **Show this dialog at next start** option.  
By default this option is checked.

## 4.3 Backup List

**Backup list** contains all the defined backups visible in the left side of FBackup's main window.

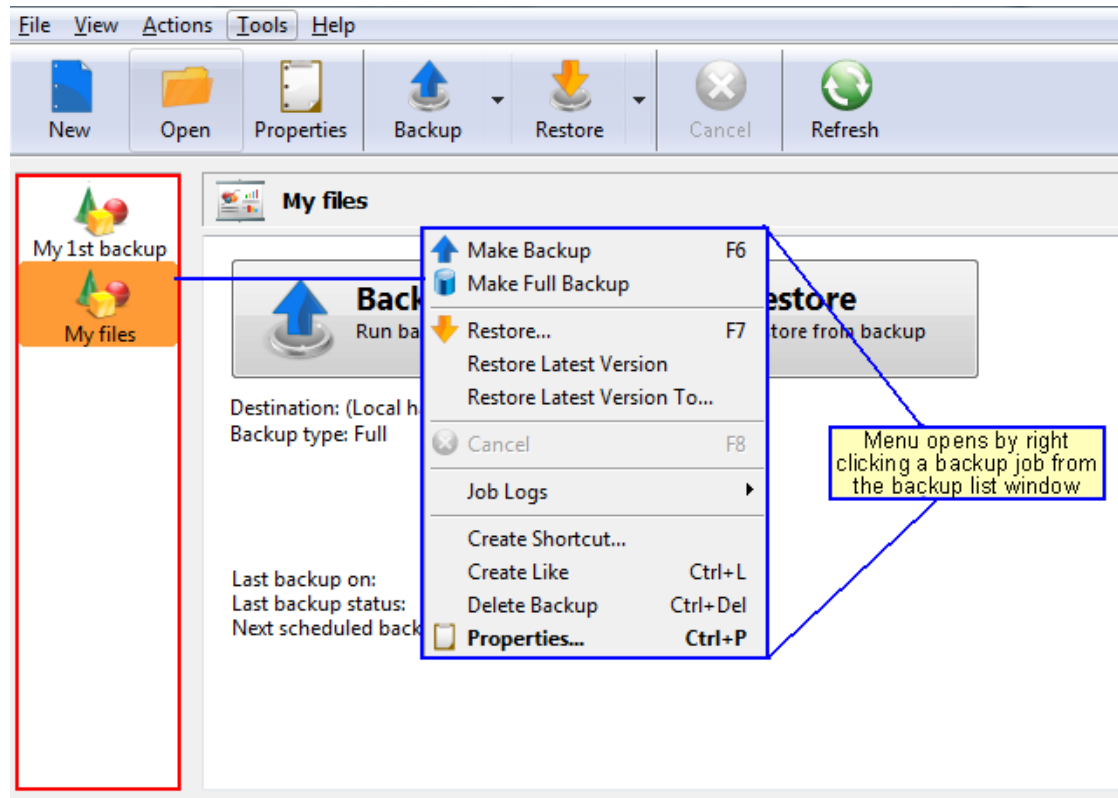


To configure a backup job's appearance (icon and label) in the backup list, you have to open the **Backup Properties** window, switch to the **General** tab, change the name of the backup job.

When right clicking a backup job, a menu is displayed giving the following options:


- **Make Backup** - starts the backup process for the selected backup job
- **Make Full Backup** - performs a full backup regardless of the backup type
- **Restore** - opens the **Restore Wizard** window for the currently selected backup job
- **Restore Latest Version** - starts the latest version restore process for the selected backup job
- **Restore Latest Version To** - opens a window to select the folder where you want the backup to be restored
- **Cancel** - aborts current backup process
- **Job Logs** - lets you open and view the **Last Backup Log**, **Last Restore Log**
- **Create Shortcut...** creates a shortcut to the backup job
- **Create Like** - duplicates a backup job
- **Delete Backup** - deletes a backup job
- **Properties...** opens the **Backup Properties** window

## 4.4 Create Shortcut

The **Create Shortcut** window can be opened from the **File->Create Shortcut...** menu item or by right-clicking the backup job from the backup list and selecting **Create Shortcut...** It creates a shortcut for the backup job on a designated location and you can simply run the backup job by double-clicking it.

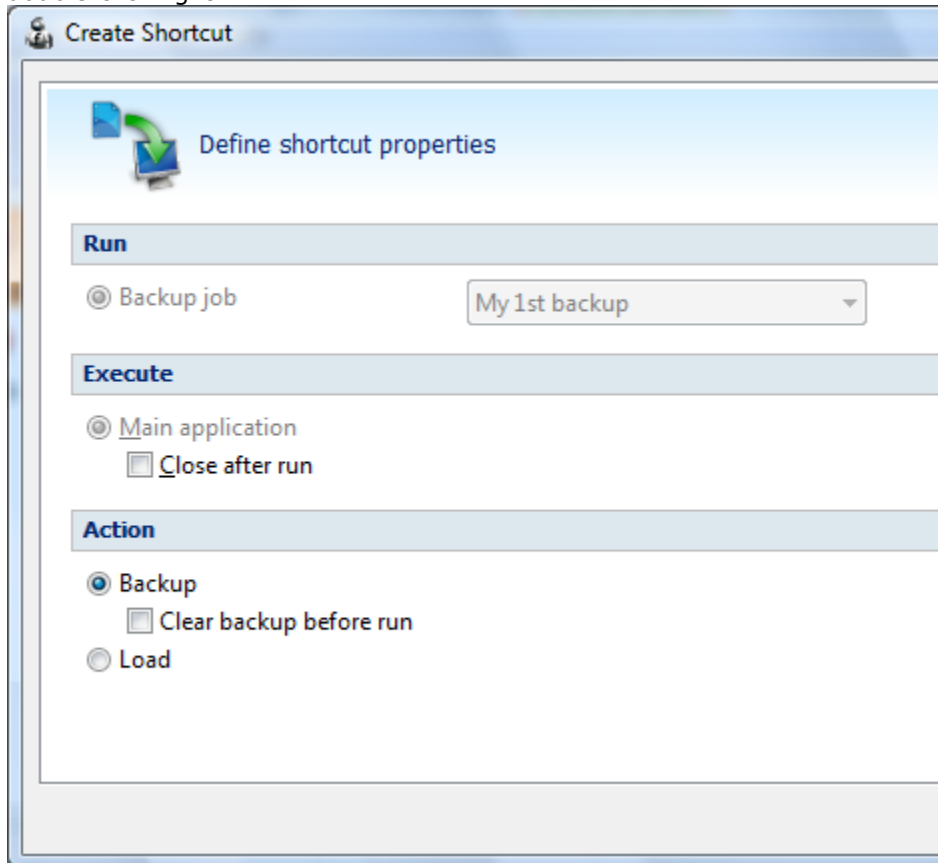

Once you have selected the Action to be performed and the backup job to run, press OK to create the shortcut. A window will prompt you to select a name for your shortcut and its destination. Once that's completed, the shortcut will be placed in the selected destination.

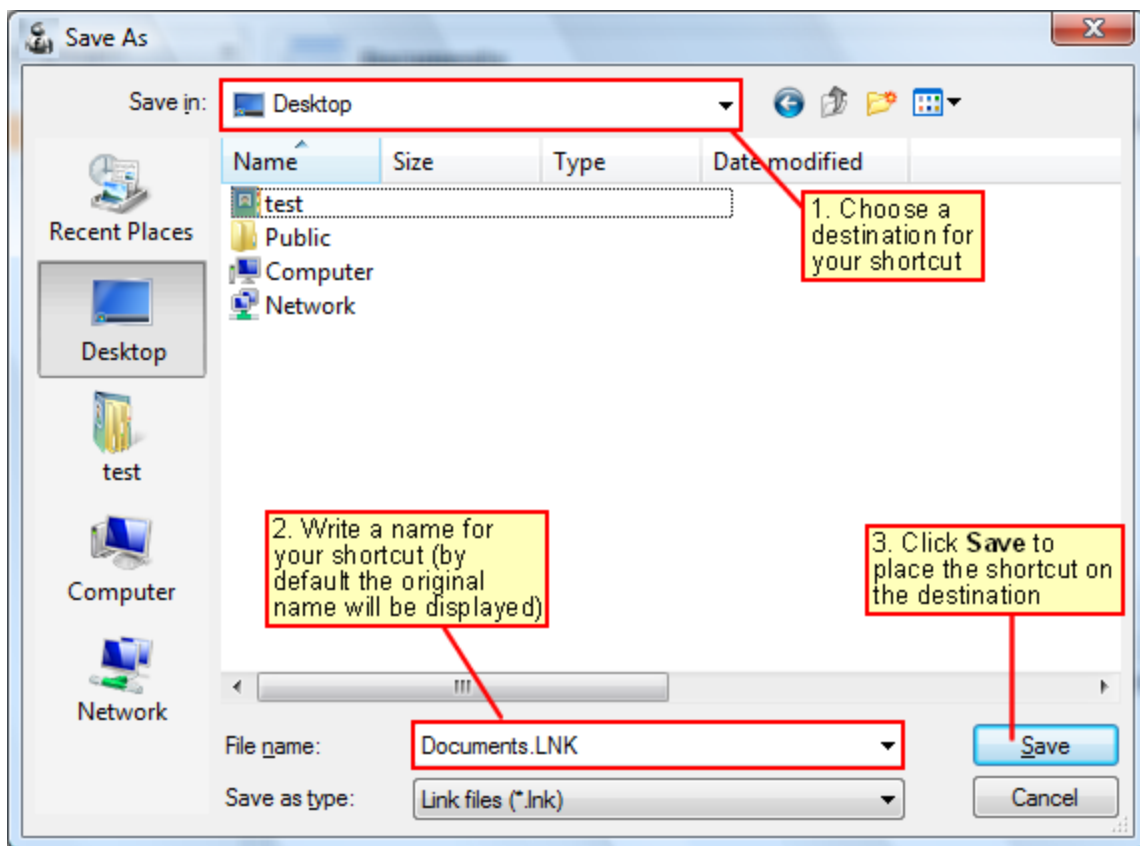

### Run

- **Backup job** - Select a backup job from the list to be executed
- **Backup group** - Select a backup group from the list to be executed
- **Backup all groups** - The shortcut will start the back up for all groups
- **One Touch Backup** - The shortcut will start the backup job/group assigned to One Touch Backup

### Execute

#### **Main application**

Option set by default. When you will double-click the backup shortcut, the main application will start and the backup will be executed. Furthermore, if the **Close after run** option is checked, FBackup will be closed after the backup job is executed.

### Action

You can select an action to perform when you double-click on the shortcut:

- **Backup**

#### **Clear backup before run**

If this is checked, FBackup will first delete the ".fkc" file and all zip files associated with the current backup job and after that execute the action.


- **Load** - at the scheduled date it opens FBackup and selects the backup job

### Priority

User can change the priority of the action started by the shortcut: backup, load, test or cleanup. Just move the cursor to a lower or higher priority level.

## 4.5 Plugins

The Manage Plugins window allows you to add, remove, enable or disable the Backup4ll plugins. After installing a plugin, you can use it on the **What do you want to backup page** when creating a new backup job using the **New Backup Wizard** or on the **Sources** page using **Advanced mode** (Backup Properties).

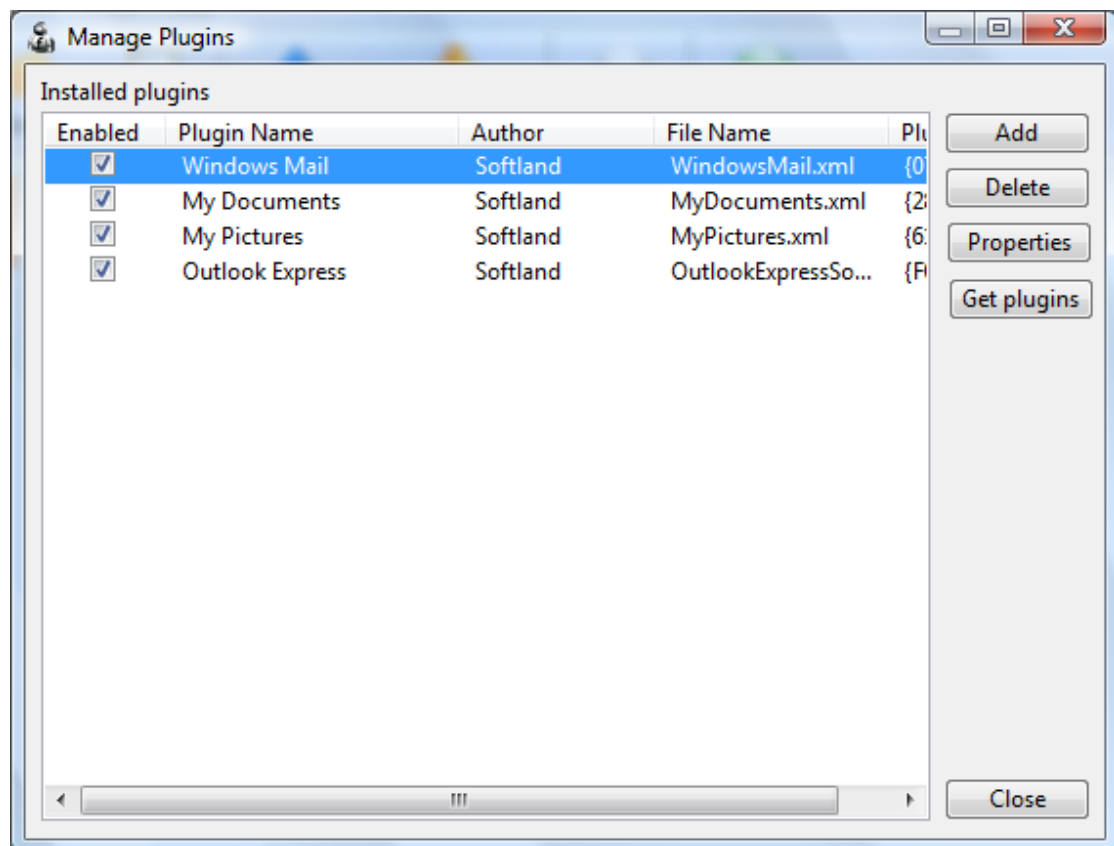

### Add

Press this button to install a new backup plugin.

You will be asked to select the plugin file location from your computer. Multiple plugin files can be selected and open.

### Delete

Use this button to remove one or more selected plugins from the list. This plugins will be removed from the **New Backup Wizard** too.

Please note that if you delete a plugin from FBackup, all backup jobs using that plugin will be removed when you restart FBackup.

### Properties

Pressing this button will open a window with details about the selected plugin and its creator as: Plugin Name, File Name, Plugin GUID, Company, Company Site and Company E-mail.



**Get Plugins**

Pressing this button will open our internet website on the Free Backup Plugins page. Here you can download plugins to be used when creating backup jobs.

**Close**

Press this button to close the Manage Plugins window.

## 4.6 Keyboard Shortcuts

**Keyboard shortcuts configured in FBackup:**

New backup wizard - **CTRL + N**



Open backup - **CTRL + O**



Backup job properties - **CTRL + P**



Refresh - **F5**




Execute backup - **F6**



Restore - **F7**




Cancel - **F8**



Focus menu - **F10**

# New Backup Wizard

**Part**

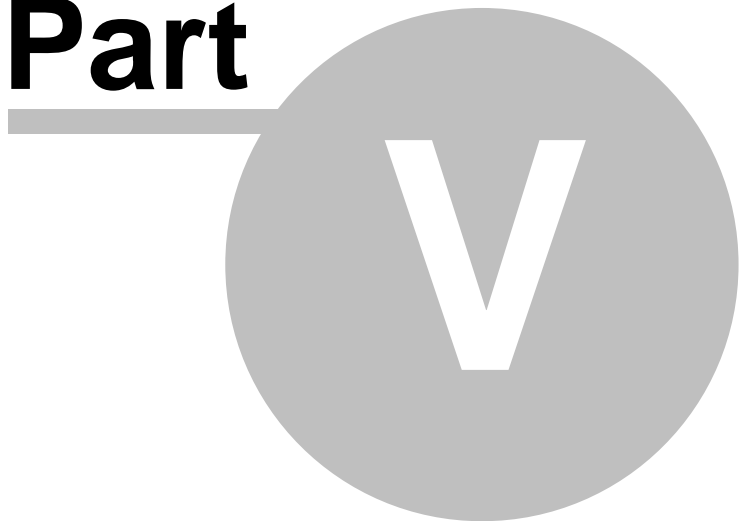

## 5 New Backup Wizard


### 5.1 Overview

Using the **New Backup Wizard** you can easily create a new backup job. The steps in wizard must be followed in the given order.

If you want to create a new backup job using advanced options, you can do that by pressing the **Advanced mode** button that will open the **Backup Properties** window. All settings from the **New Backup Wizard** are included in the **Backup Properties**.

### 5.2 Name and destination

In the first step of the **New Backup Wizard** you can configure the backup name and the backup destination.

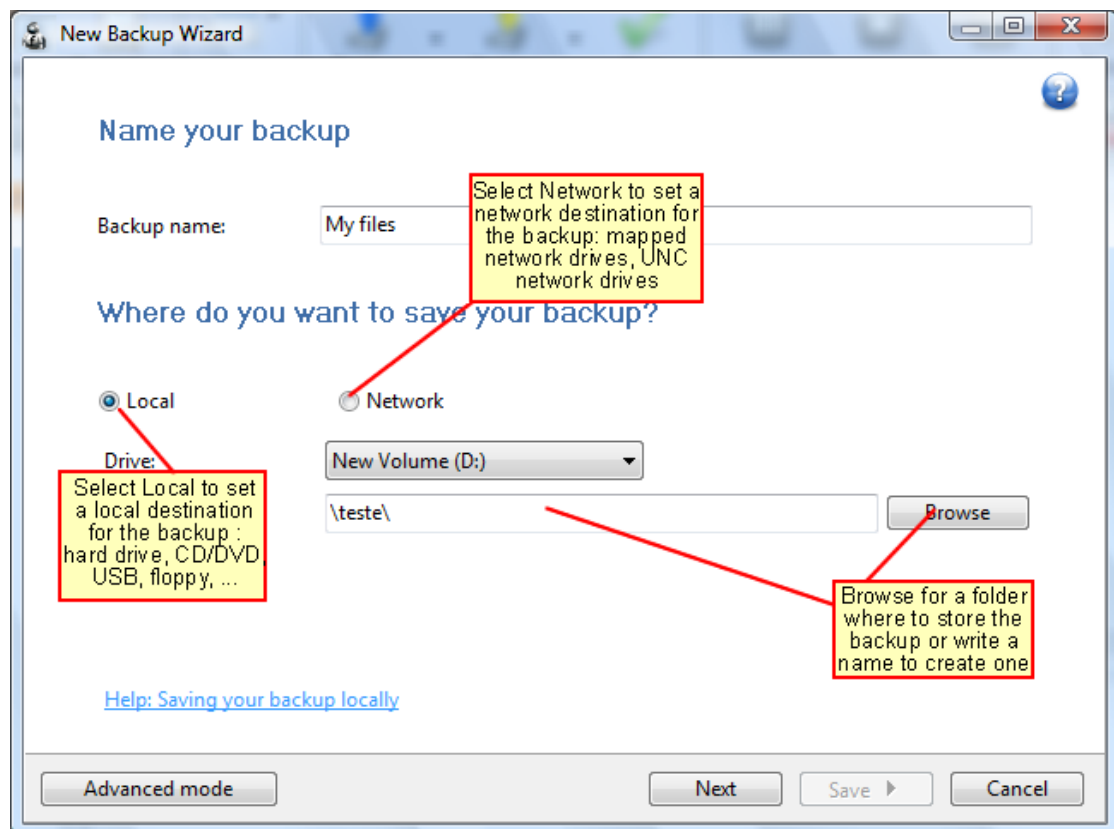

#### Name your backup

##### **Backup Name**

Enter the name of the backup job. This name will appear in the backup list, right under the chosen picture. This field is mandatory.

The name of the backup job is closely related to the name of the subdirectory in destination that contains zipped and mirrored files and to the name of the catalog. That is why when you rename the backup job, the name of the catalog and the name of the subdirectory from destination are

also changed if possible.

If the destination is on HDD (local), LAN (network) FTP or SFTP (remote) the name of the subdirectory and the name of the catalog can be changed, except for the case when you do not have enough permission to rename or some files are locked.

### **Where do you want to save your backup**


User can select one of the available destinations:

- **Local:** hard disk drive, floppy drive, zip drive, USB drive, mapped network drive
- **Network:** UNC network drive

#### **5.2.1 Local**

You can use a valid local destination for your backup: hard disk drives, floppy disk drives, zip drives, USB drives .

The **Local** option is selected by default when you define a new backup. From the **Drive** list, you can select either one of your hard disk partitions, mapped network drives, the floppy disk. By default, the first partition is selected (usually **C:**).

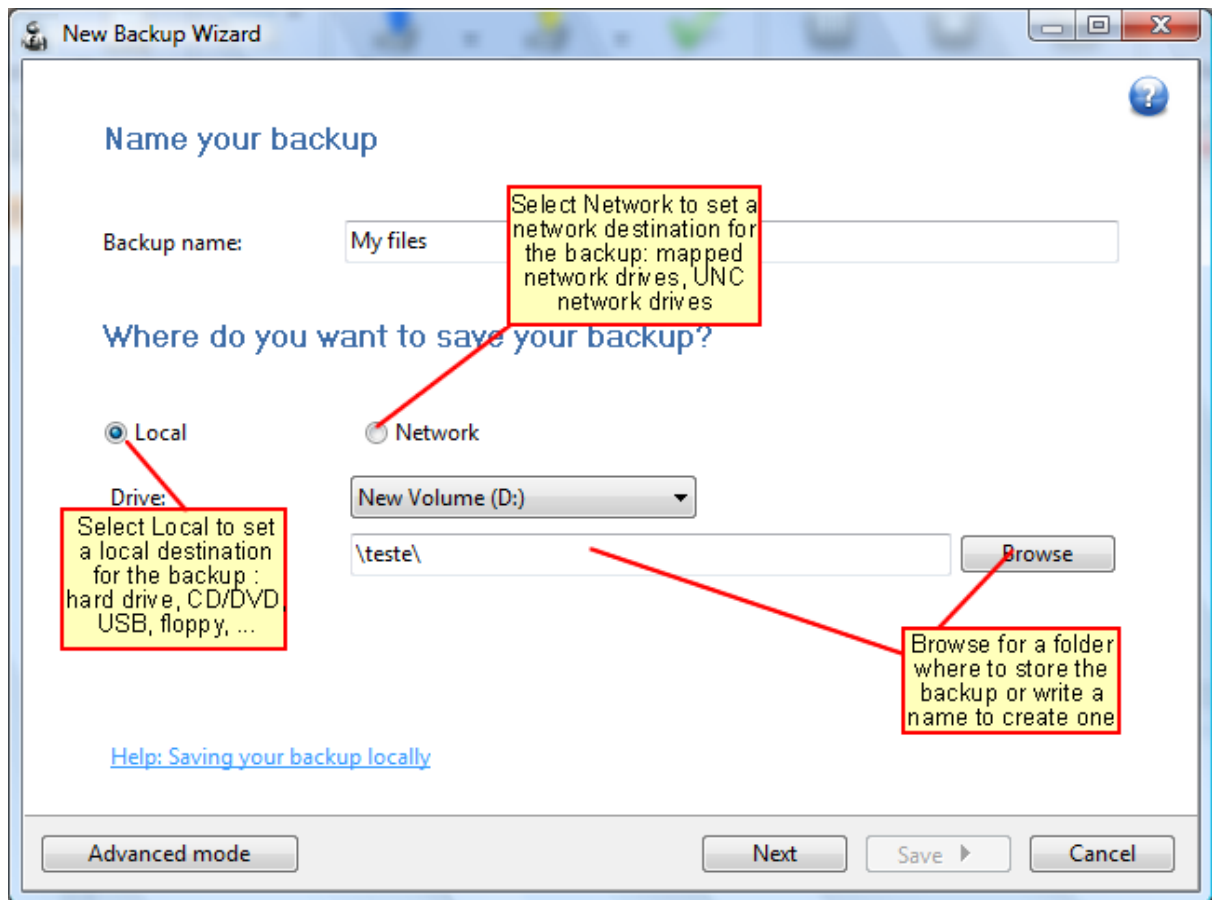

In the **Folder where to perform the backup** field by default it is the path to the **My FBackup 4** folder (\\Users\\<user name>\\Documents\\MyFBackup 4). You can click the **Browse** button and

select a destination folder of your choice where the backup will be stored.

If the destination drive is missing, an error message is shown containing the list of missing drives. The user can choose **Cancel** to stop the backup process or **Retry** to check the drive again. If the scheduler starts the backup then the system will retry as many times as set in the **Tools->Options->Backup** window and if still not possible to access the drive it will abort the backup process.

### 5.2.2 Network

You can use a network destination for your backup by selecting the **Network** option in the **Where do you want to save your backup?** section.

The screenshot shows the 'New Backup Wizard' window. The title bar says 'New Backup Wizard'. The main heading is 'Name your backup'. Below it, 'Backup name:' is followed by a text box containing 'My Pictures'. The next heading is 'Where do you want to save your backup?'. There are two radio buttons: 'Local' (unselected) and 'Network' (selected). Below the radio buttons, there are three text boxes: 'Folder:' containing '\\Backup Server\\PC1', 'User:' containing 'username', and 'Password:' containing '\*\*\*\*\*'. To the right of the 'Folder:' box is a 'Browse' button. Below the 'Password:' box is a 'Test' button. At the bottom left is a link: 'Help: Saving your backup to a network destination'. At the bottom of the window are five buttons: 'Advanced mode', 'Previous', 'Next', 'Save', and 'Cancel'.

Click the **Browse** button and go through the **My Network Places** to select a destination where the backup will be stored.

You can also enter network paths in the **Folder** field. Only a full path is allowed. For example, suppose **\\Backup\_Server\\PC1** is mapped on your workstation as drive **X:**, then the following paths are both valid and indicate the same folder: **\\Backup\_Server\\PC1\\Backup** or **X:\\Backup**.

Make sure you can write in the destination and in the selected folder (you have the proper rights and the media is not write-protected) before finishing the backup configuration. You can enter an **User name** and **Password** to access the network destination if it requires authentication. If you are logged in as an user that has rights to write to the specified network destination, you can


check the **First use Windows auth.** option. What this option does is that it checks on the network destination if the logged in user has rights to access it.

After entering the path and eventually the username and password, use the Test button to see if the destination is reachable and that you have sufficient rights to access it. The **network connection was tested successfully** pop-up message means that the network destination was accessible. In case of insufficient rights the following error message will appear: **Network connection error. Access is denied.** In this case you have to either make sure that the entered username and password values are correct, or contact the network administrator to obtain the necessary rights.

If the destination is missing (when the network is disconnected), an error message is shown. The user can choose **Cancel** to stop the backup process or **Retry** to check the network connection again.

## 5.3 What do you want to backup?

In the second step of the **New Backup Wizard**, you must select the files and folders to be used by FBackup for the backup.

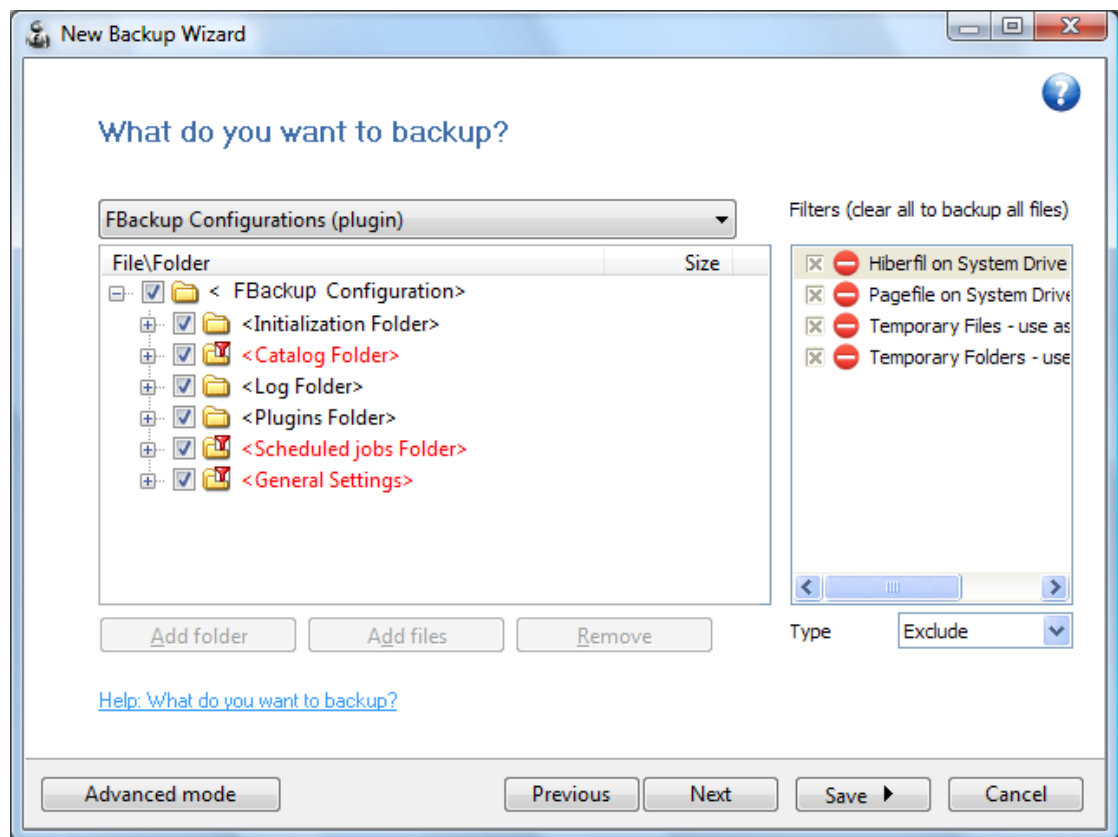

You can:

- add a whole folder by pressing the **Add folder** button
- add one or several files by pressing the **Add files** button
- remove any file or folder by selecting it and pressing the **Remove** button
- exclude subdirectories and files from backup by un-checking the thickbox ☒

**You must add at least one file or directory in order to continue with the next step of the wizard.**

During backup, if the source drive is missing (when the network is disconnected for instance or CD/DVD/Blu-ray is missing), a warning message is shown containing the list of missing drives. The user can choose **Abort** to stop the backup process, **Retry** to check the drive again, **Ignore** to mark the source folder as deleted and continue with the next sources.

#### Filters list

In the right side of the New Backup Wizard window there is the Filters list. You can use these filters to customize the file selection.

By default, the list contains filters to exclude temporary and system files such as: hiberfil.sys, pagefile.sys etc. If you don't want to use a filter from that list, simply clear (un-check) it. Clear all filters if you want to backup all files.

#### Tips:

- try to keep the number of checked files and folders greater than the number of unchecked files and folders - backup process will run faster this way.
- you can add files/folders to the **Sources** window by dragging and dropping them from **Windows Explorer**.

## 5.4 How do you want to backup?

In the third step of the **New Backup Wizard** you can choose the backup type.

New Backup Wizard

How do you want to backup?

Make full

Encrypt?

☐ Yes ☒ No

New password:

Confirm new password:

[Help: How do you want to backup?](#)

Advanced mode Previous Next Save Cancel

### **How do you want to backup?**

From the drop-down list, you can choose one of the available options:

- Make full
- Make mirror

#### **Make full**

Full backup is the starting point for all other backups and contains all the data in the folders and files that are selected to be backed up. Because full backup stores all files and folders, frequent full backups result in faster and simpler restore operations. Remember that when you choose other backup types, restore jobs may take longer.

#### **Make mirror**

A mirror backup is identical to a full backup, with the exception that the files are not compressed in zip files and they cannot be protected with a password. A mirror backup is most frequently used to create an exact copy of the backup data. It has the benefit that the backup files can also be readily accessed using tools like Windows Explorer.

If you choose the **Make mirror** option, you can also check the **Compress** option to zip each file individually, preserving the folder structure. This allows you to use the zip compression and encryption features.

### **Encrypt?**

Use this option if you want to add zip protection to your backups. Type the password you want to use for this backup.

The default encryption used is Standard encryption (Zip2 compatible)

## **5.5 When do you want to backup?**

On the last page of the **New Backup Wizard**, you can choose **When to run the backup**.



When do you want to backup?

How often? Weekly

What day? Sunday

What hour? 8:00 PM

[Help: When do you want to backup?](#)

Advanced mode Previous Next Save Cancel

**How often?**

From the drop-down list, you can select one of the available option:

- **Manually** - the backup job will be started manually by the user
- **Daily** - the backup job will be started daily at its scheduled time
- **Weekly** - the backup job will be started weekly at its scheduled time
- **Monthly** - the backup job will be started monthly at its scheduled time
- **Shutdown** - the backup job will be started at the computer shutdown

By default, the selected option is Manually.

**What day?**

This field is activated only when the **Weekly** or **Monthly** option is selected in the **How often** list. If the **Weekly** option is selected, you can choose the day of the week when to run the backup. If the **Monthly** option is selected, you can choose the day number of the month when to run the backup.

**What hour?**

From this field, you can select the hour for the backup job to start.

# Backup Properties

**Part**

---

**VI**

## 6 Backup Properties


### 6.1 Overview

The **Backup Properties** window can be used to create new backup jobs in the advanced mode, or to edit an existing backup job.

By default, the **New Backup Wizard** will be used to create new backup jobs.

### 6.2 General

The **General** page defines the appearance of the backup job in the backup list.

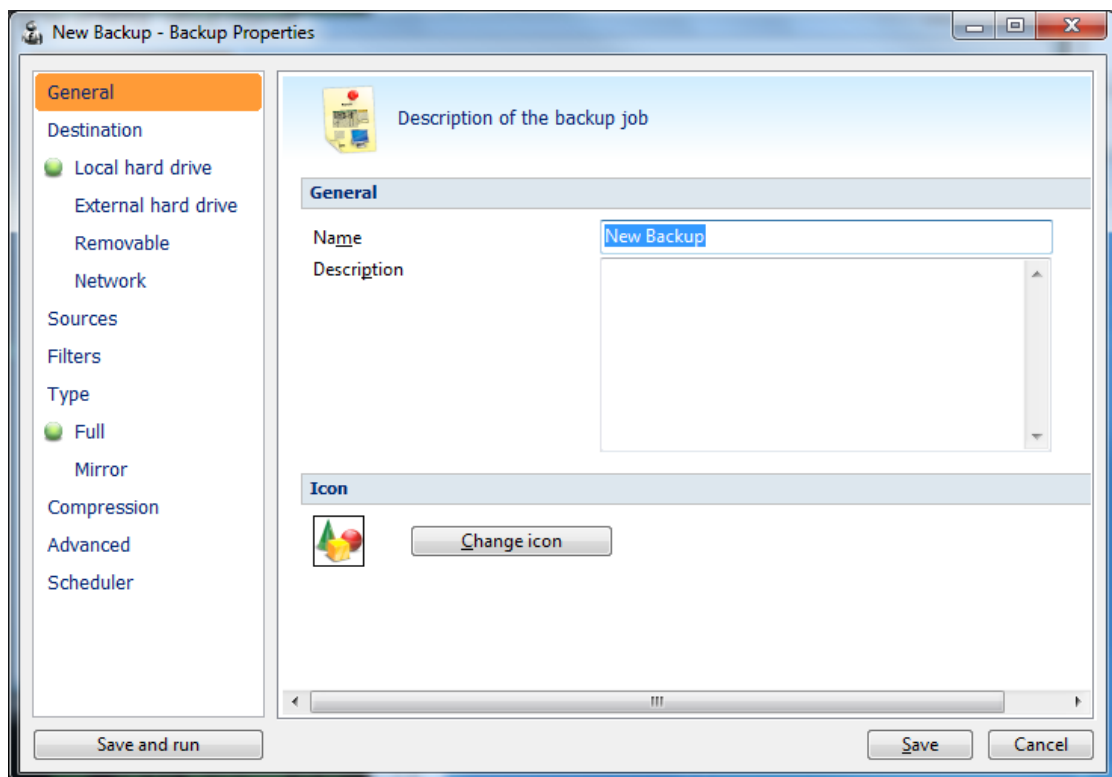

#### **Name**

Enter the name of the backup job. This name will appear in the backup list, right under the chosen picture. This field is mandatory.

The name of the backup job is closely related to the name of the subdirectory in destination that contains zipped and mirrored files and to the name of the catalog. That is why when you rename the backup job, the name of the catalog and the name of the subdirectory from destination are also changed if possible.

If the destination is on HDD (local), LAN (network) the name of the subdirectory and the name of the catalog can be always changed, except for the case when you do not have enough permission to rename or some files are locked.

#### **Description**


You can write in here a text describing the backup job defined

### Icon

Press the **Change Icon** button to manage the backup job icons. This icon will be shown in the **Backup List**. You can add a new icon by clicking on the **Add** button. Only Windows icons (files with ".ico" extension) or bitmaps (files with ".bmp" extension) can be added to the list. To remove an icon from the list, you have to select it and then click on the **Delete** button. By default, each new backup job icon will be the first icon from the **Change Icon** list.

## 6.3 Destination

The **Destination** page defines where the backup archive will be stored.

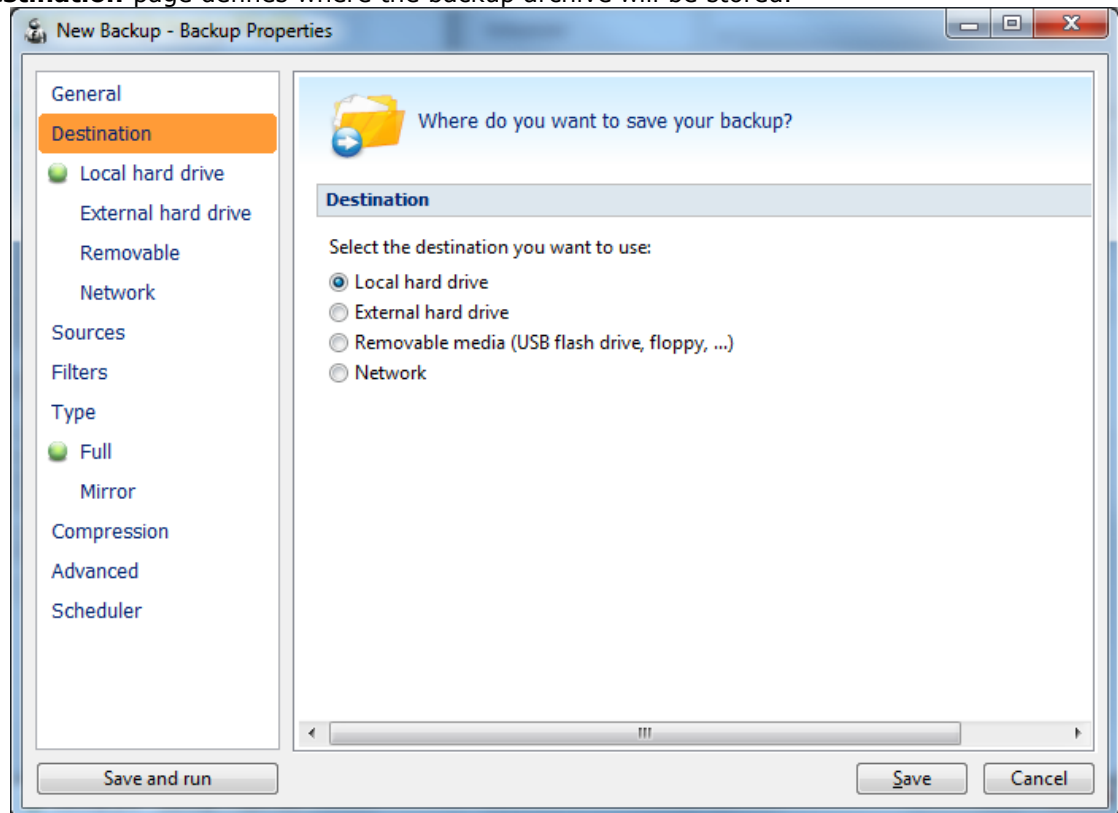

### Destination

Valid destination types:

- **Local hard drive**
- **External hard drive**
- **Removable**
- **Network**

Selecting a backup destination type on the **Destination** page, will enable the options on the corresponding type page.


You can also change the backup destination from any destination type page by checking the **Change destination to...** option.

If you lost your backup job from the backup list and you want to recreate it, you can do so by using the **File->Open backup** option and selecting an existing ".fkc" or ".ini" file. The same action takes place if you double click on the ".fkc" file. A new backup job configuration will be

added to the backup list and the configuration of the new backup job is copied from the ".fkc" file.

### 6.3.1 Local hard drive

You can use a valid local hard disk destination for your backup. The **Local hard drive** option is selected by default when you define a new backup.

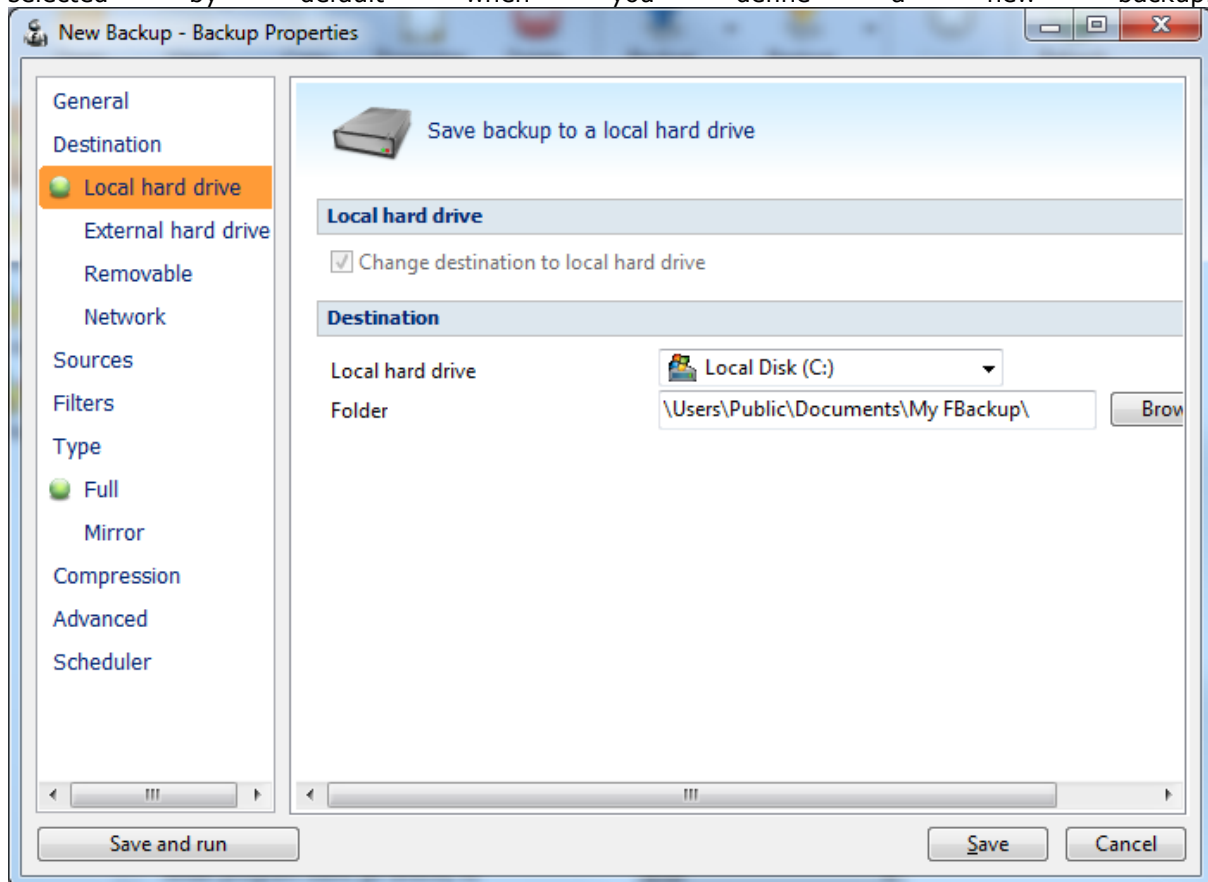

#### Destination


If the current backup destination is not a local hard drive, you can change it by checking the **Change destination to local hard drive** option.

In the **Folder where to perform the backup** field by default it is the path to the **My FBackup 4** folder (\\Documents and Settings\\<user name>\\My Documents\\MyFBackup 4). You can click on the **Browse...** button and select a location of your choice where the backup will be stored.

In destination folder field, you can use Environment Variables as %Computename%, %SystemDrive%, %UserName% etc.

### 6.3.2 External hard drive

You can select an external hard drive as destination for backup.

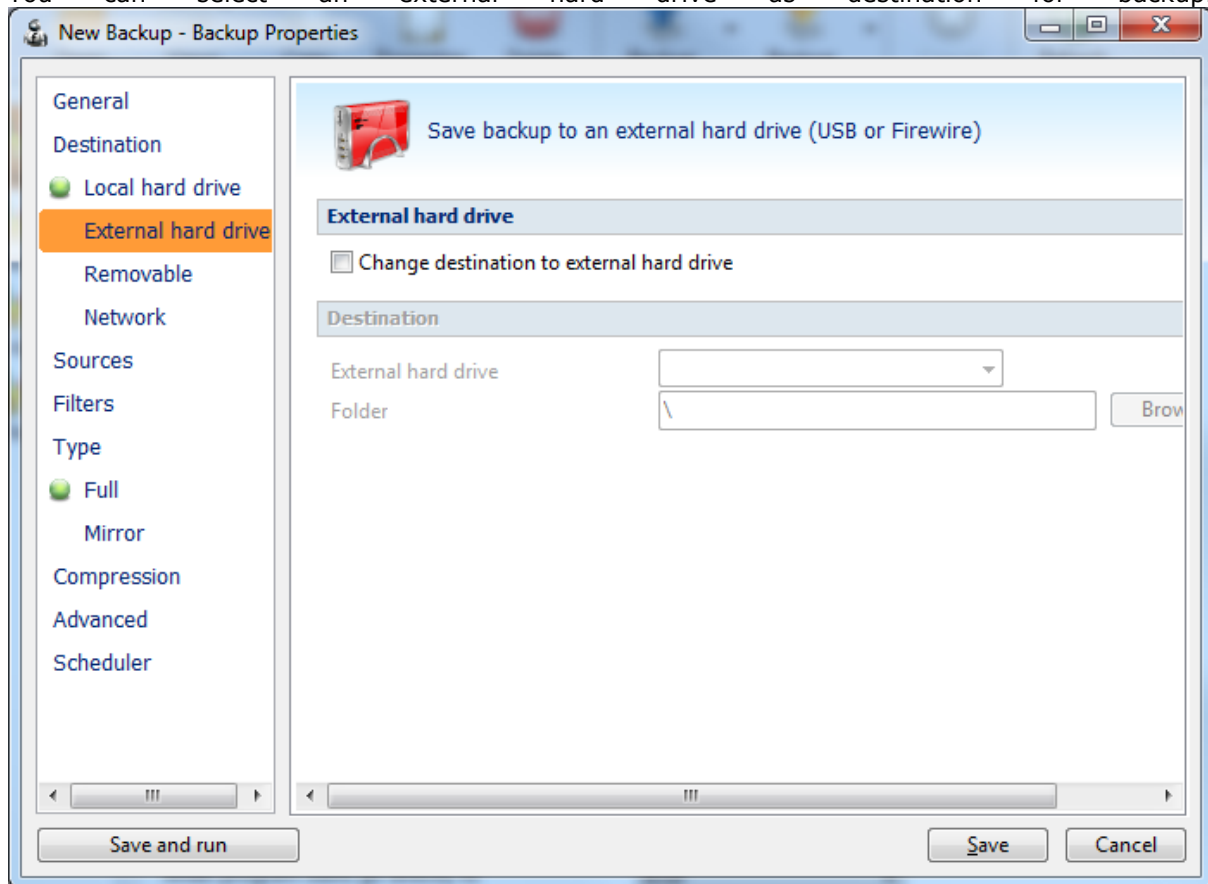

#### Destination


If the current backup destination is not an external hard drive, you can change it by checking the **Change destination to local hard drive** option.

From the **External hard drive** list, you can select either an USB or a Firewire external hard drive. You can type a folder name in the **Folder** field or you can click the **Browse** button to choose another folder where the backup will be stored.

In destination folder field, you can use Environment Variables as %Computername%, %SystemDrive%, %UserName% etc.

### 6.3.3 Removable

You can save your backup to a removable drive (USB flash drive, floppy etc) as destination for backup.

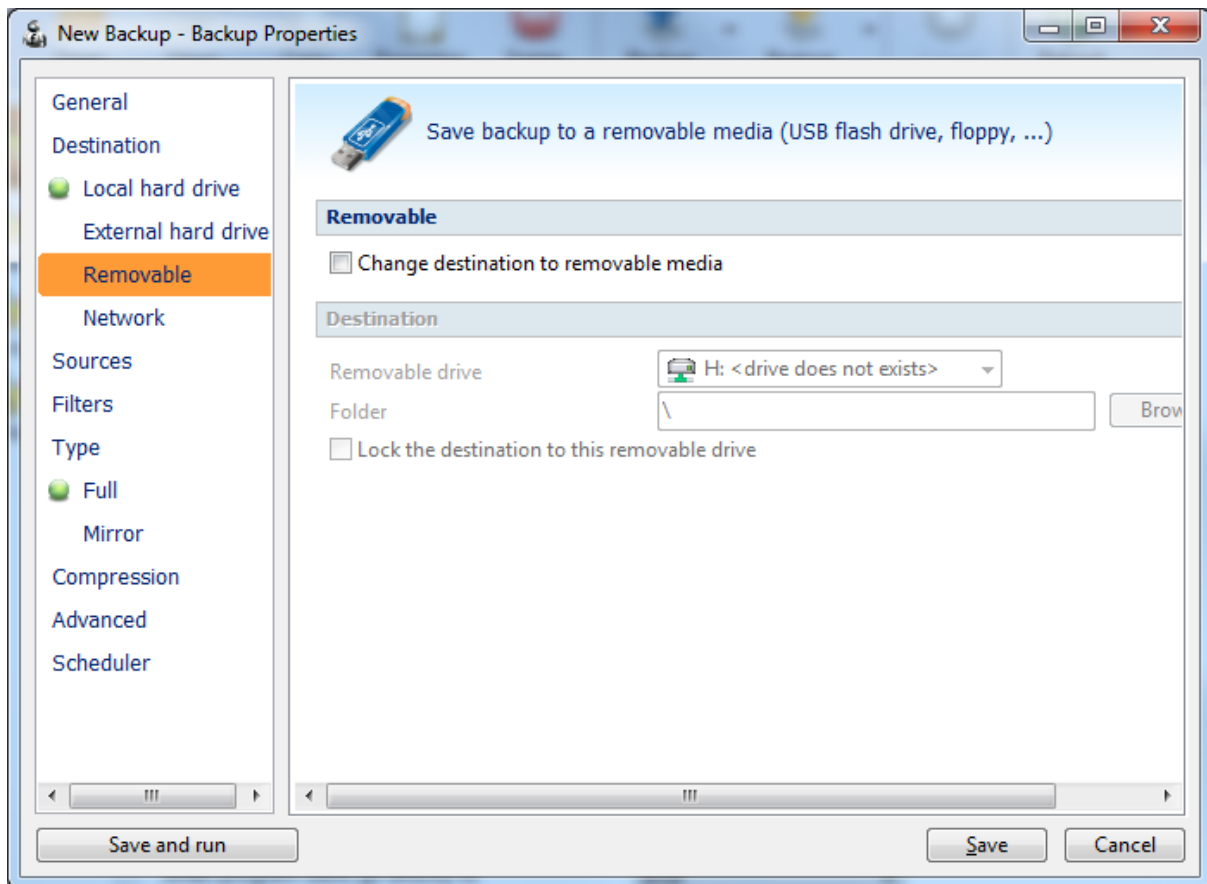

### **Destination**

If the current backup destination is not a removable drive, you can change it by checking the **Change destination to removable disk** option.

You can type a folder name in the **Folder** field or you can click the **Browse** button to choose another folder where the backup will be stored.

In destination folder field, you can use Environment Variables as %Computername%, %SystemDrive%, %UserName% etc.

### **Lock the destination to this external hard drive**

When disconnecting and reconnecting an external drive, your computer may not assign it the same drive letter. If the drive letter was changed, the backup might fail because FBackup is trying to backup to the same old drive letter which probably does not exist.


Use this option if you want FBackup to detect the external drive after its own serial number and automatically change the backup destination according with the new drive letter.

You should not check this option if you use a rotation backup scheme with two or more external hard drives.

By default, this option is not checked.

### 6.3.4 Network

You can choose to save your backup to a shared network drive (another computer or NAS).

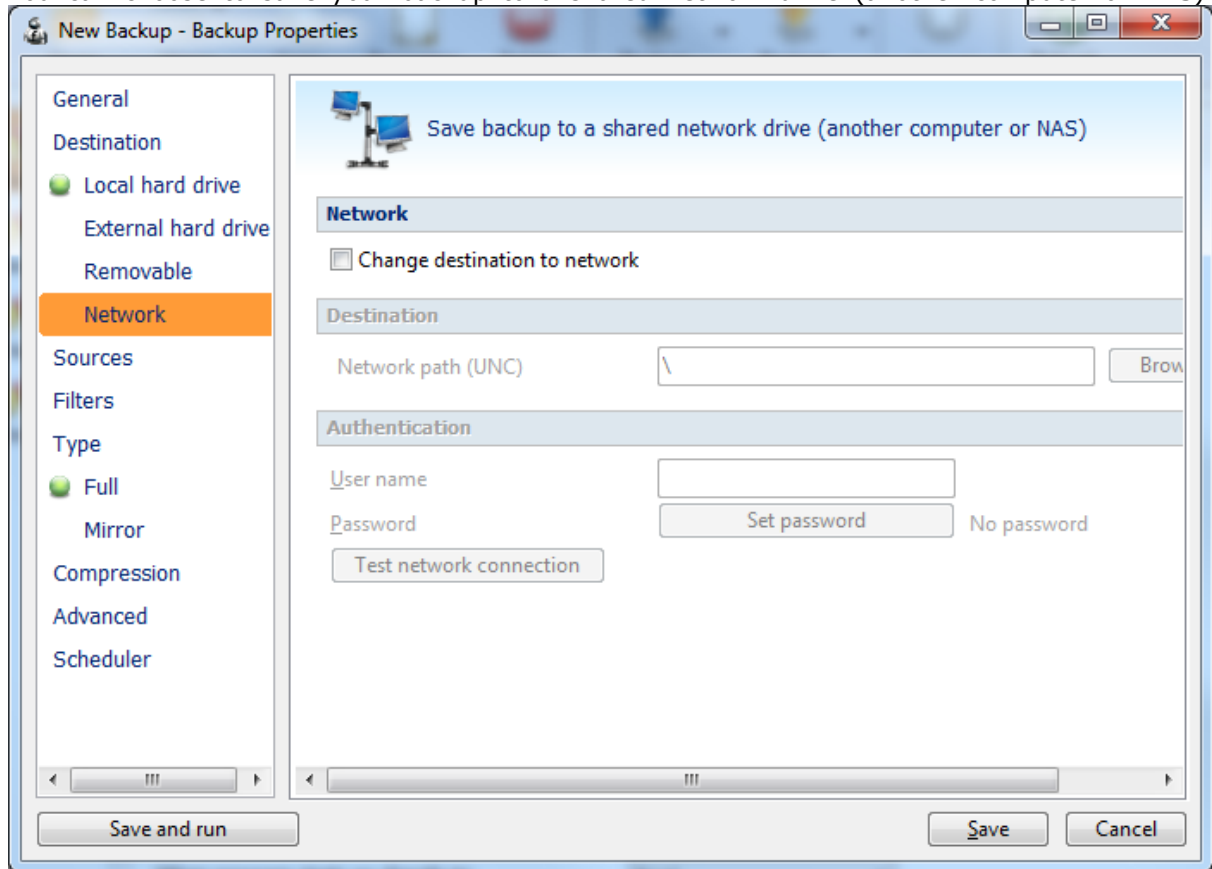

#### Destination

You can use a network destination for your backup by selecting the **Network** option from the **Destination** window or by checking the **Change destination to network** option from the network page.

Click the **Browse** button to open **My Network Places** and select a destination where the backup will be stored.

You can also enter network paths in the **Network path (UNC)** field. Only a full path is allowed. For example, suppose **\\Backup\_Server\PC1** is mapped on your workstation as drive **X**, then the following paths are both valid and indicate the same folder: **\\Backup\_Server\PC1\Backup** or **X:\Backup**.

In destination folder field, you can use Environment Variables as %Computername%, %SystemDrive%, %UserName% etc.

#### Authentication

Make sure you can write in the destination and in the selected folder (you have the proper rights and the media is not write-protected) before finishing the backup configuration. You can enter an **User name** and **Password** to access the network destination if it requires authentication.

After entering the path and eventually the username/password, use the **Test network connection** button to see if the destination is reachable and that you have sufficient rights to access it. The **network connection was tested successfully** pop-up message means that the




network destination was accessible. In case of insufficient rights the following error message will appear: **Network connection error. Access is denied**. In this case you have to either make sure that the entered username/password values are correct, or contact the network administrator to obtain the necessary rights.

If the destination is missing (when the network is disconnected), an error message is shown.

The user can choose **Cancel** to stop the backup process or **Retry** to check the network connection again.

## 6.4 Sources

The **Sources** page defines what files and folders will be used by FBackup for the backup.

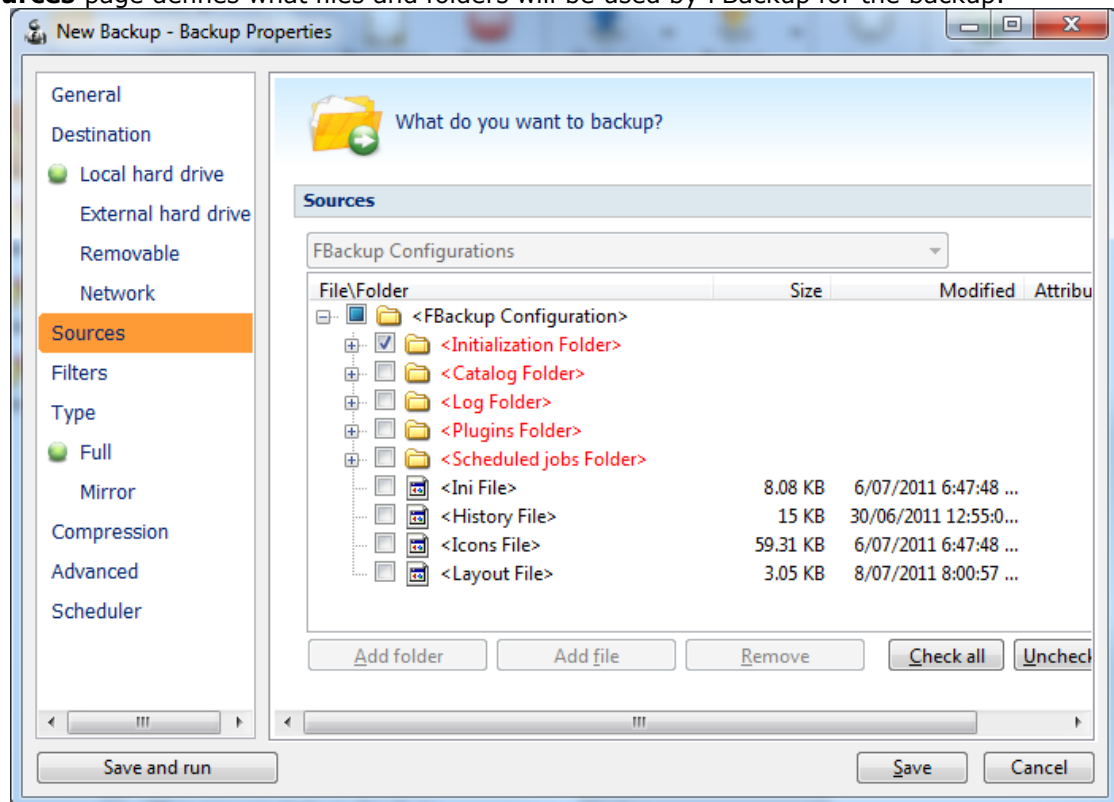

You can:

- add a whole folder by pressing the **Add folder** button
- add one or several files by pressing the **Add files** button
- remove any file or folder by selecting it and pressing the **Remove** button
- exclude subdirectories and files from backup by un-checking the thickbox ☒
- select all files and folders by pressing the **Check all** button
- unselect all files and folders by pressing the **Uncheck all** button


**At least one source must be added to the backup job.**

If the source drive is missing, a warning message is shown containing the list of missing drives. The user can choose **Abort** to stop the backup process, **Retry** to check the drive again, **Ignore** to mark the source folder as deleted and continue with the next sources.

**Tips:**

- ## 6.5 Filters

You can use the **Add include** and **Add exclude** buttons to add filter rules for the current backup job.

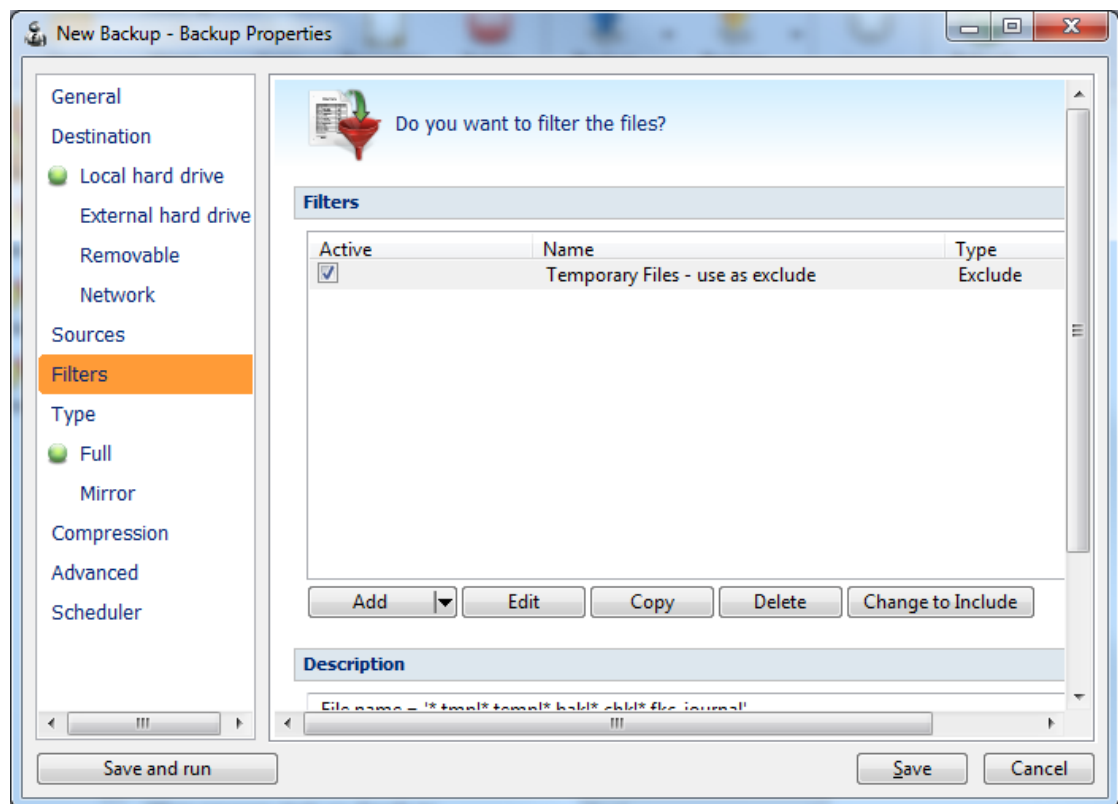

Include and exclude filters are composed from filter restrictions. Two or more filter restrictions in the include filter means that a file must satisfy at least one restriction to be included in the backup. Two or more filter restrictions in the exclude filter means that a file must satisfy any restriction to be excluded.

Filters on files and filters on folders must be created individually. If you use a file and a folder filter condition in the same filter, files will be filtered only if both filter conditions were met.

If you use a single filter for .jpg files and Temp folder, only the .jpg files from Temp folder will be


filtered. If you use separate filters for files and folders, all .jpg files and whole Temp folder will be filtered.

You can manage filter restrictions using the buttons:

- **Add include** - this will open a new Filter Properties window from where you can add a new include restriction to the filters list.
- **Add exclude** - this will open a new Filter Properties window from where you can add a new exclude restriction to the filters list.
- **Edit** - will open the selected filter's properties window. You will be able to modify the selected restriction.
- **Copy** - this will create a copy of the selected filter.
- **Delete** - will remove the selected filter from the list of include or exclude filters.

## 6.6 Type

### Backup type

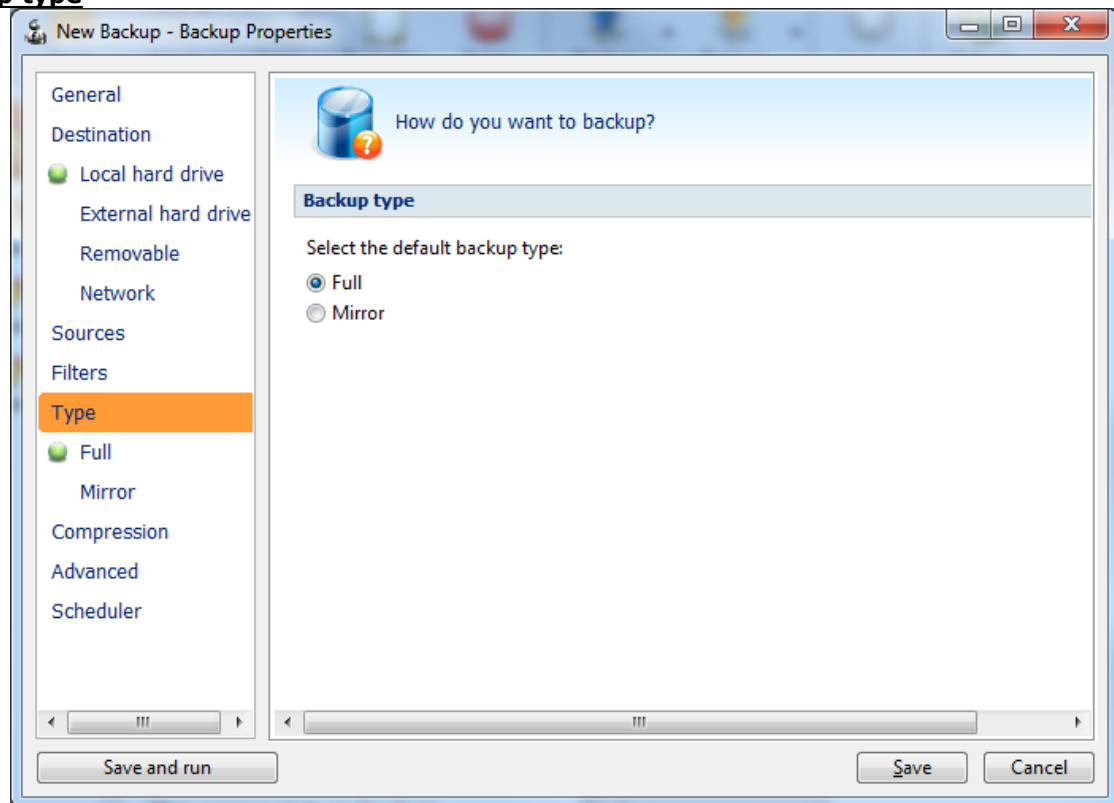

User can select one of these backup types:


- Full
- Mirror

The backup type can be changed from the **Type** page in **Backup Properties**.

Full backup type uses zip compression to reduce the size of the stored backup versions.

The mirror backup type creates in destination an exact copy of the source file without zipping them.


### 6.6.1 Full

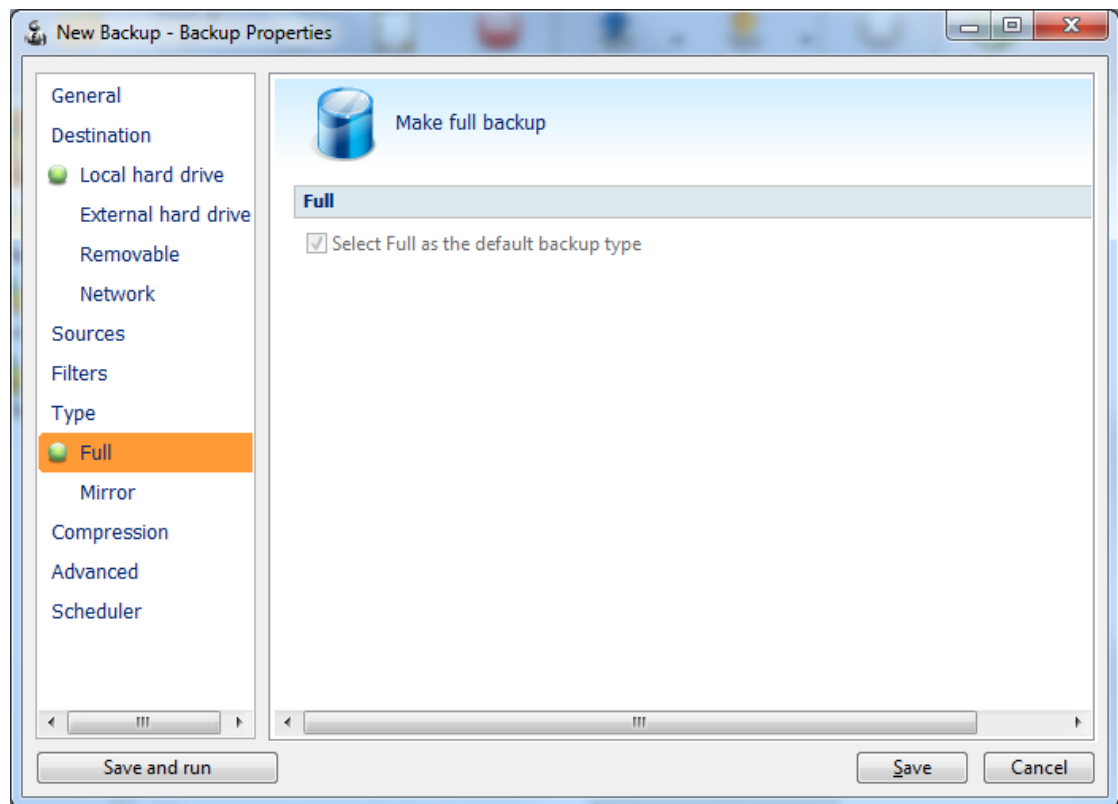

If the **Full** type is not your default backup type, you can check the **Select Full as the default backup type** option.

### 6.6.2 Mirror

A **mirror backup** is identical to a full backup, with the exception that the files and folders are not compressed in zip files and they cannot be protected with a password. A mirror backup is most frequently used to create an exact copy of the backup source data. The sources folder tree will be recreated in the destination.

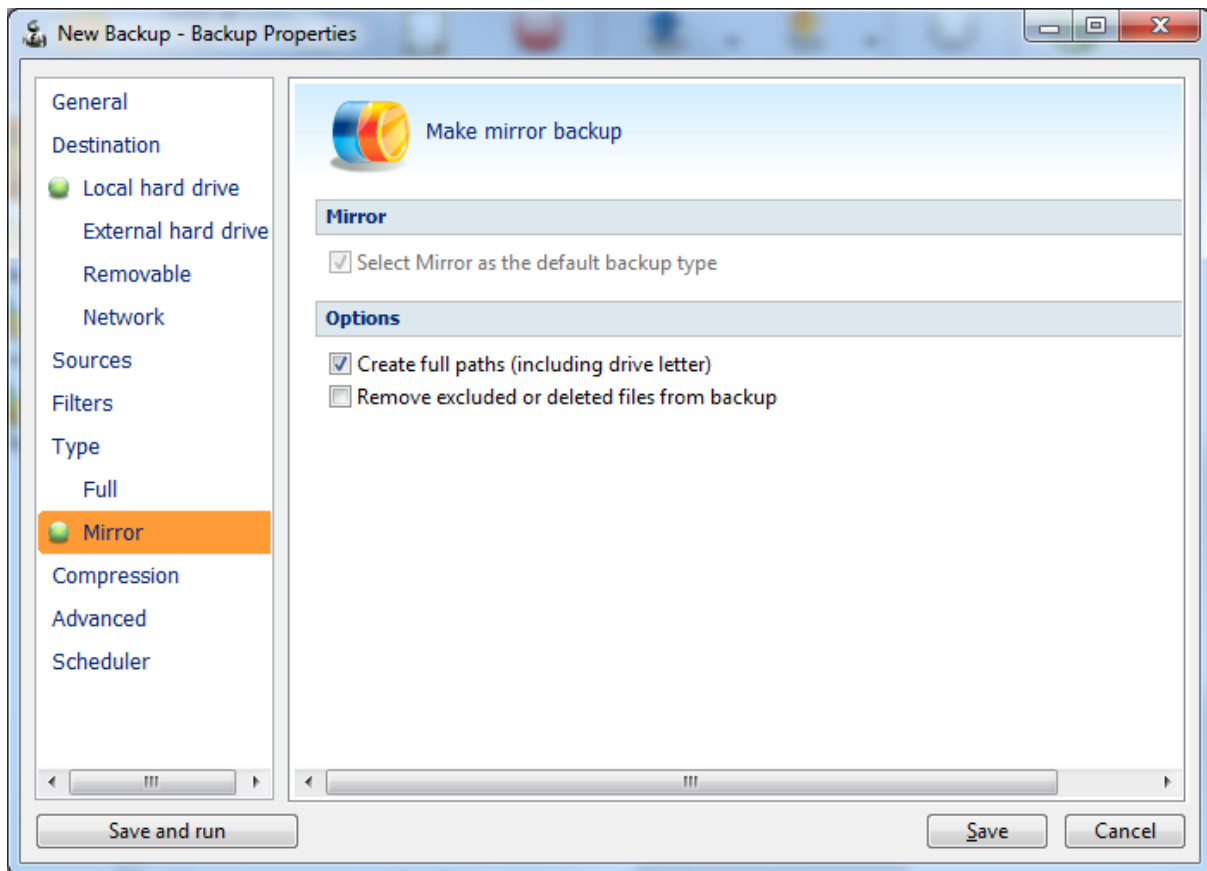

If the **Mirror** type is not your default backup type, you can check the **Select Mirror as the default backup type** option.

#### Create full paths (including drive letter)

Sometimes there can be sources with the same names. The system will detect this conflict situation and will show a warning message.

To avoid files to be overwritten check the **Save full folder info** option. This will create the full path of the source in the destination.


For example, suppose we have the backup source "C:\My Documents\My Pictures". Without this option, only the **My Pictures** folder will be created and its subfolders. With this option set, the destination will contain the **C** folder, **My Documents** inside **C** folder, **My Pictures** inside **My Documents** folder and so on. By default this option is unchecked.

#### Remove excluded or deleted files from backup

Use this option to remove from the backup the files that were deleted (or excluded) from the backup sources. When you select this option (unchecked by default), you'll get a warning message that the deleted files will be removed from the backup too - press **Yes** if you want to continue.

## 6.7 Compression

On the **Compression** page, you can configure the compression and encryption settings.

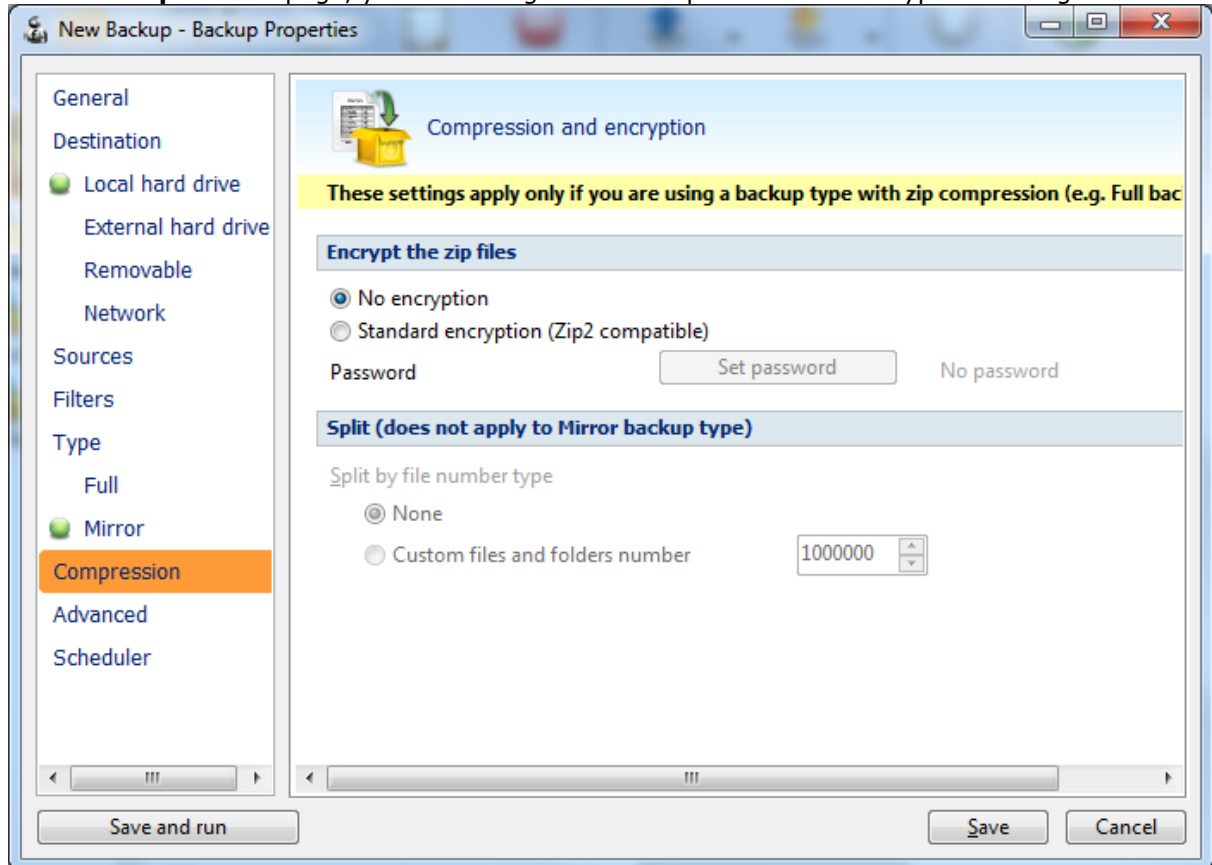

### Encrypt the zip files

#### **No encryption**

The zip files created are not protected by password for unauthorized access.

#### **Standard encryption (Zip2 compatible)**

This is the standard Zip 2.0 encryption: an older encryption technique that provides relatively weak security compared to AES encryption. Zip 2.0 encryption format cannot provide protection from individuals with access to specialized password recovery tools. Its advantage over AES encryption is the compatibility with all third party zip applications.

#### **Set password**

After you press this button, a windows with the following fields will appear:

- **New password**  
Manually enter the password you want to use for your zip files in this field
- **Confirm new password**  
Re-enter the password in this field to avoid typing errors.
- **Old password**

This field is enabled only when the backup job already has a password. You can change the password only if you enter the old one in this field. This way only the owner of the backup will be allowed to change the password.


The system makes it possible to set different passwords for the same backup job, so the backup may contain zip files with different passwords.

**Tips:**

- when choosing a password, it is recommended that you use a combination of letters and numbers and at least 8 characters.
- FBackup does not store passwords. Make sure that you remember all passwords that have been used for a backup job, or you will not be able to restore your files.

## 6.8 Advanced


Options on this page affect the way a particular backup job is executed.

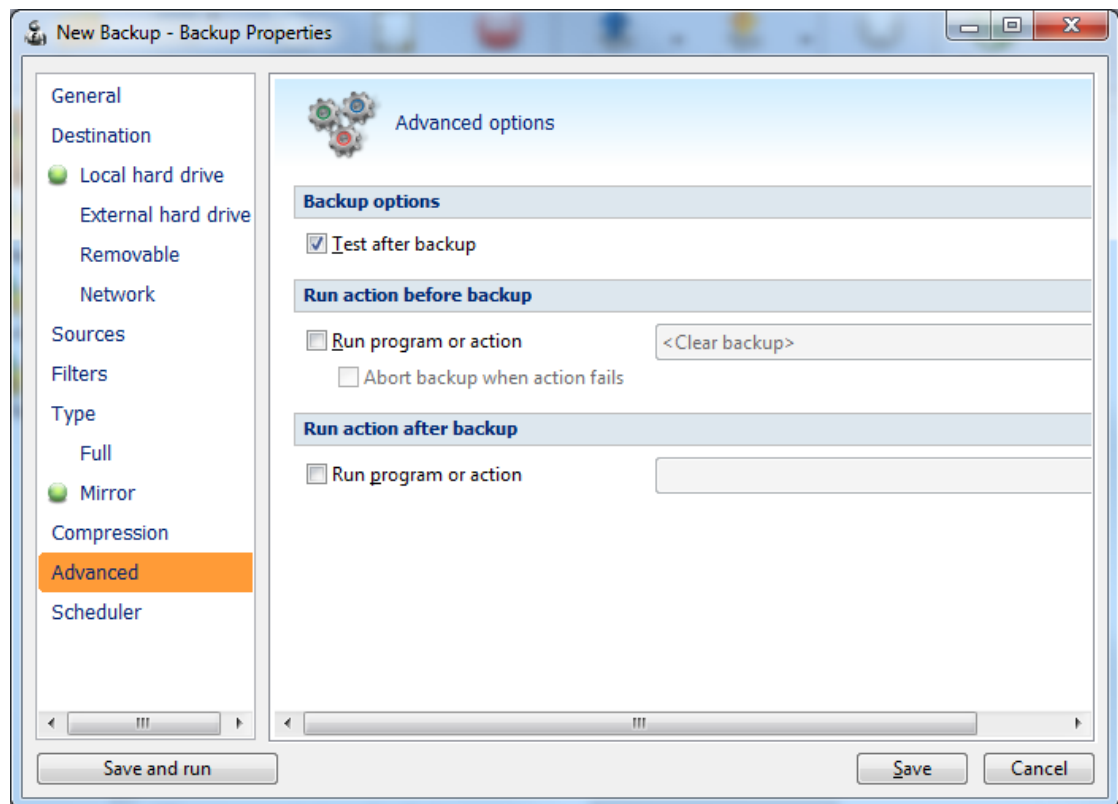

### **Run action before backup**

#### **Run program/action**

Check this option and select one of the predefined actions or choose a different executable file.

You can either enter directly the path to the program (has to be between quotes) or click the  button to browse for the file. FBackup waits until the action is finished before proceeding with the actual backup process.

The **<Clear backup>** predefined action deletes the ".fkc" file and all zip files associated with the current backup job.

#### **Run only once**

If this option is set, the action will run only once at the next backup execution and the **Run program/action** option will be reset and disabled afterwards.

#### **Abort backup when action fails**

User can check this option to abort the backup if the action ran before the backup failed.

FBackup uses the exit codes returned by the applications.

If the exit code is 0 (zero), it means the action was successful.

If the exit code is different than 0 (zero), the action was not successful and the backup will be aborted.

FBackup returns exit codes after each task execution (backup, independent test or cleanup).

As a general case, if the backup was successful, the exit code is 0, otherwise is different.


Here are the possible exit codes:

- if backup was successful, the exit code is 0
- if there are parameter errors or syntax errors, the exit code is 1
- if backup was aborted, the exit code is 2
- if backup was finished with warnings, the exit code is 3
- if the independent test was finished with errors, the exit code is 4
- if cleanup was finished with errors, the exit code is 5
- if B4aCmd was not correctly installed, the exit code is 6

### **Run action after backup**

#### **Run program/action**

Check this option and select one of the predefined actions or choose a different executable file.

You can either enter directly the path to the program (has to be between quotes) or click the  button to browse for the file. FBackup does not wait for the action to be finished before proceeding.

Available predefined actions:


- **<Stand by>** - The computer will enter in the **Stand by** state after the backup is executed.
- **<Hibernate>** - Computer enters in **Hibernate** (if available) after the backup execution.
- **<Log off>** - **Logs off** current user.
- **<Shut down>** - **Shuts down** the computer after the backup was executed.

## **6.9 Scheduler**

### **Scheduler**


**Scheduler** lists all the available information about the scheduled tasks and allows you to Add, Edit, Delete and Schedule new tasks. This only applies to the current backup job.



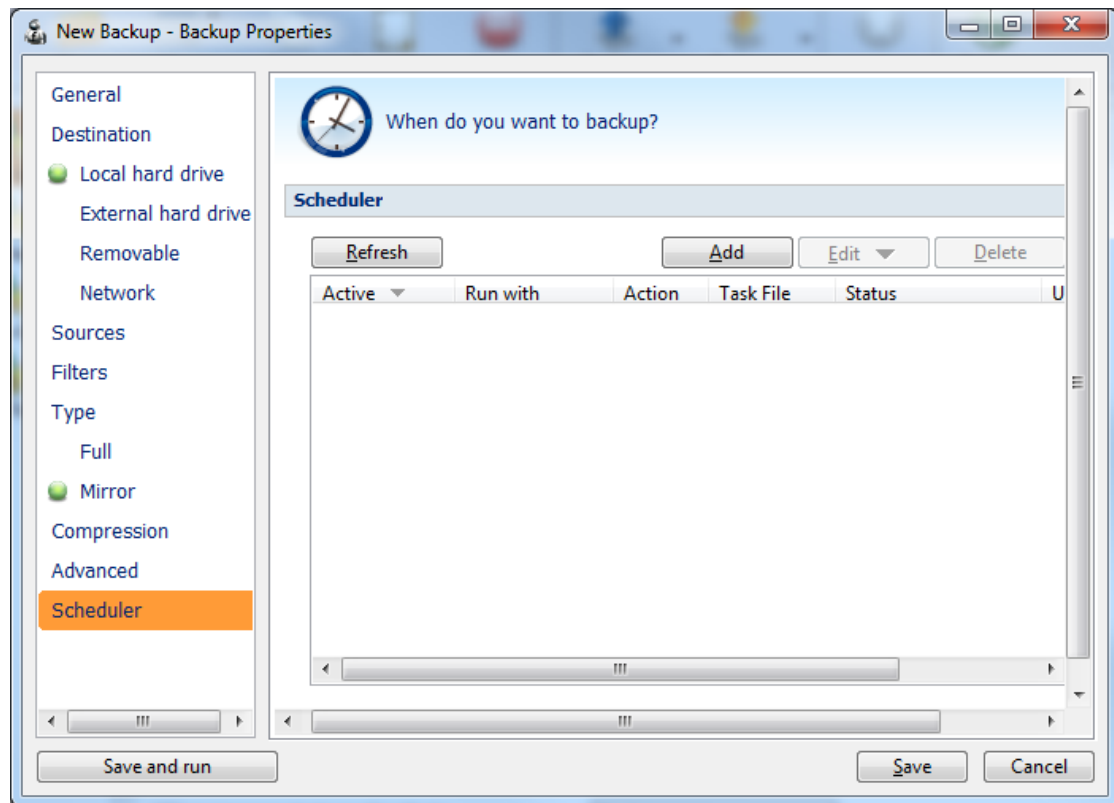

Right-clicking an existing scheduled task (or using the top buttons) will display the following options:

- **Add** - opens the Scheduler Properties window and allows you to add a new scheduled task
- **Edit**
  - **Properties** - opens the Scheduler Properties window where you can edit selected the scheduled task
  - **Schedule** - opens the Windows Scheduled Tasks properties window that allows you to set the time and frequency for the selected scheduled task.
- **User and password** - opens a window where you can set the username and the password.
  - **Delete** - removes the selected scheduled task
  - **Refresh** - refreshes the scheduled tasks list

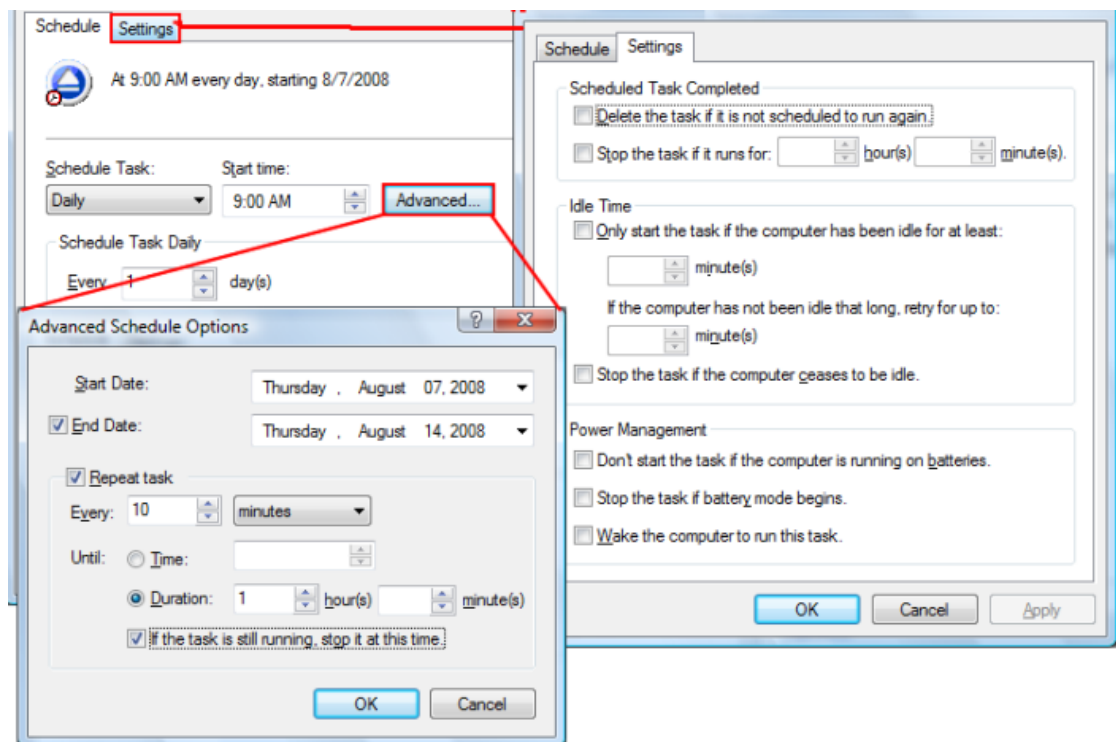

There are several columns in the **Schedulers** window that provide information for each scheduled task:

- **Enabled** - if the checkbox is marked then the scheduled task will run, if is unchecked it will not be executed
- **Scheduler** - shows the scheduler type: Windows, Standalone or Shutdown.
- **Action** - shows the type of action associated with the scheduled task (default, full)
- **Job Name** - shows the task name assigned by the scheduler
- **Status** - displays the status of the scheduled task
- **Next Run Time** - calculates the next date and time when the scheduled task will run.
- **Last Run Time** - shows the last date and time when the scheduled task ran.
- **Schedule** - shows the type of schedule selected for the task
- **User** - shows the user name for which the job is scheduled to run


The scheduled tasks in the list can be sorted by clicking on the column headers. The right-click menu on the column header provides a handy way to show/hide columns (except the Enabled which are grayed out).

The scheduled backup jobs in backup list will have the clock icon displayed over the job's icon.



## 6.9.1 Scheduler Properties

The **Scheduler Properties** window will be displayed when you click on the **Add** or **Edit** button in the main **Scheduler** window or in the **Scheduler** page of the **Backup Properties**. This allows you to add or edit a scheduled task for the current backup job.

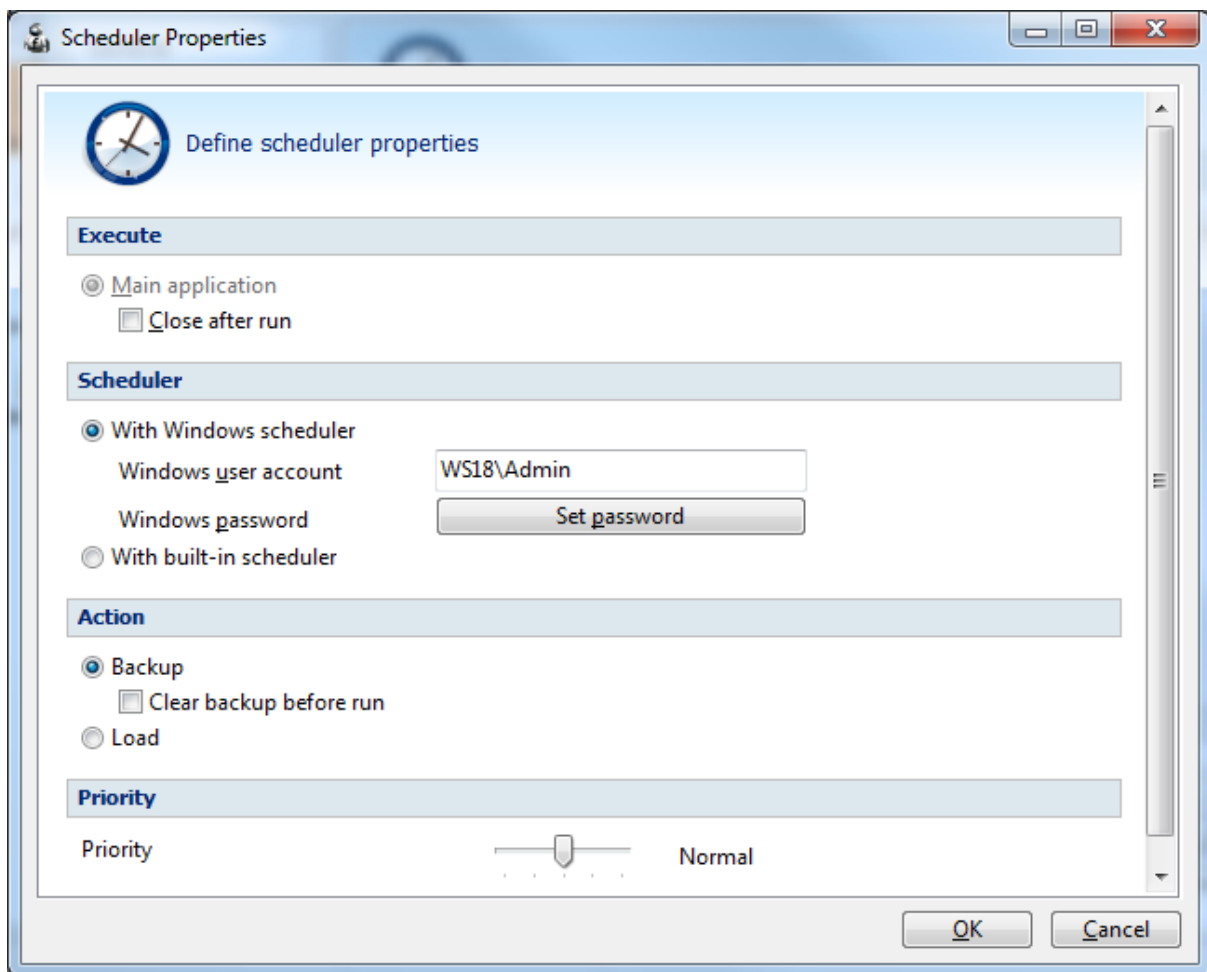

### **Execute**

#### **Main application**

This is the option set by default. If FBackup is closed when a scheduled task needs to be executed, the main application starts and the task runs. Furthermore, if the **Close after run** option is checked, FBackup will be closed after the task is executed.

### **Scheduler**

**Select Scheduler type** allows scheduling a task to run:

- **With Windows scheduler** - If this is selected, the tasks will be scheduled and executed using the internal scheduler from Windows. Over the standalone scheduler (FBackup's internal scheduler), the Windows Scheduler has the advantage of being able to run the task even if there is no user logged in or if the computer is in hibernation/stand by.
- **With built-in scheduler** - If this is selected, the tasks will be scheduled and executed using FBackup's internal scheduler. If this option is selected, the **User account** field is grayed out since the Windows login username/password are not required. Using the standalone scheduler tasks cannot be executed if there is no user logged in to Windows. To be able to run tasks when no user is logged in you have to use the Windows Scheduler option.

#### **User account**

In this field, by default, the current logged in user's login name will be displayed. If your user account has a password make sure that you enter it by pressing the **Set password** button. We do not save your password but it is needed in order to set up the scheduled task in the **Windows Task Scheduler**. If your user account does not have a password you must select the **Allow blank passwords when scheduling** option from **Tools->Options->Preferences**. Also, make sure that you enter the correct password - if the password is wrong the scheduled task will not run.

### **Action**

You can select an action to perform when the scheduled task for the current backup job runs:

- **Backup**

- Clear backup before run**

- If this is checked, FBackup will first delete the ".fkc" file and all zip files associated with the current backup job and after that execute the scheduled backup.

- **Load** - At the scheduled date it opens FBackup and selects the backup job

### **Priority**

Indicates the task priority. Move the cursor to right or left in order to increase or decrease the priority.

# Restore Wizard

## Part

---




VII

## 7 Restore Wizard

### 7.1 Where and how to restore


Using the **Restore Wizard** you can restore from a backup job. In the first step you can choose the destination, the priority of the execution and customize the restore operation if you wish.

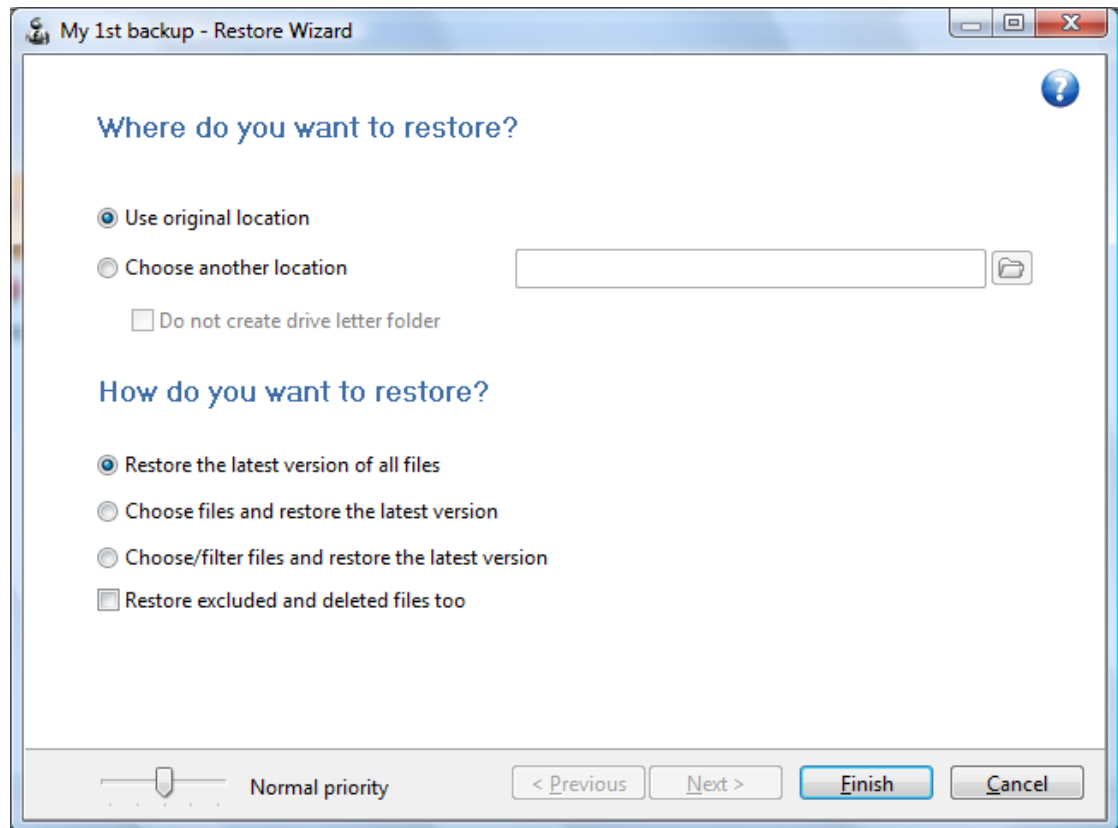

#### Where do you want to restore?

##### **Use original location**

Copies the files from the zip backup into the original location. If a file with the same name already exists, a dialog will be shown prompting for an action before the restore can continue.

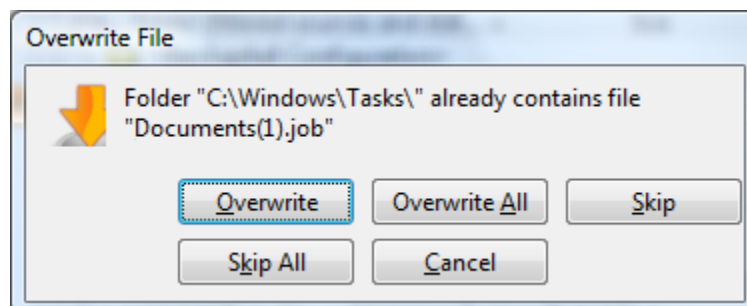

**Choose another location**

Copies files from the zip backup to a different folder. If selected, you can choose a different folder to restore files from the backup.

**Do not create drive letter folder**

If checked, FBackup will restore the files in the designated location using the original directory structure. If you select this option and you have files from multiple drives, some files might get overwritten. For example, if you backed up your **Documents and Settings** folder from your **C** drive, when you restore it to a different location having the **Do not create drive letter folder** unchecked, FBackup will first create a folder named **C** and in it place the **Documents and Settings** folder. If you would have checked the **Do not create drive letter folder** option, the folder named **C** wouldn't have been created.

**How do you want to restore?****Restore the latest version of all files**

FBackup will restore the latest version for all the files in the backup.

**Choose files and restore the latest version**

FBackup will restore the latest version for all the files in the backup. You will be able to filter the files using the **Preview** page.

**Choose/filter files and restore the latest version**


FBackup will restore the latest version of the files. Files that are excluded from backup are not restored. Check the status of the files in the **Explore** view of the main screen.

**Restore excluded and deleted files**

If this option is checked, the latest version of all files will be restored, even if these files were excluded from the backup.

## 7.2 What do you want to restore

This is the second step of the **Restore Wizard**. It appears only for **Choose files and restore from the latest version**, **Choose/filter files and restore the latest version** options.

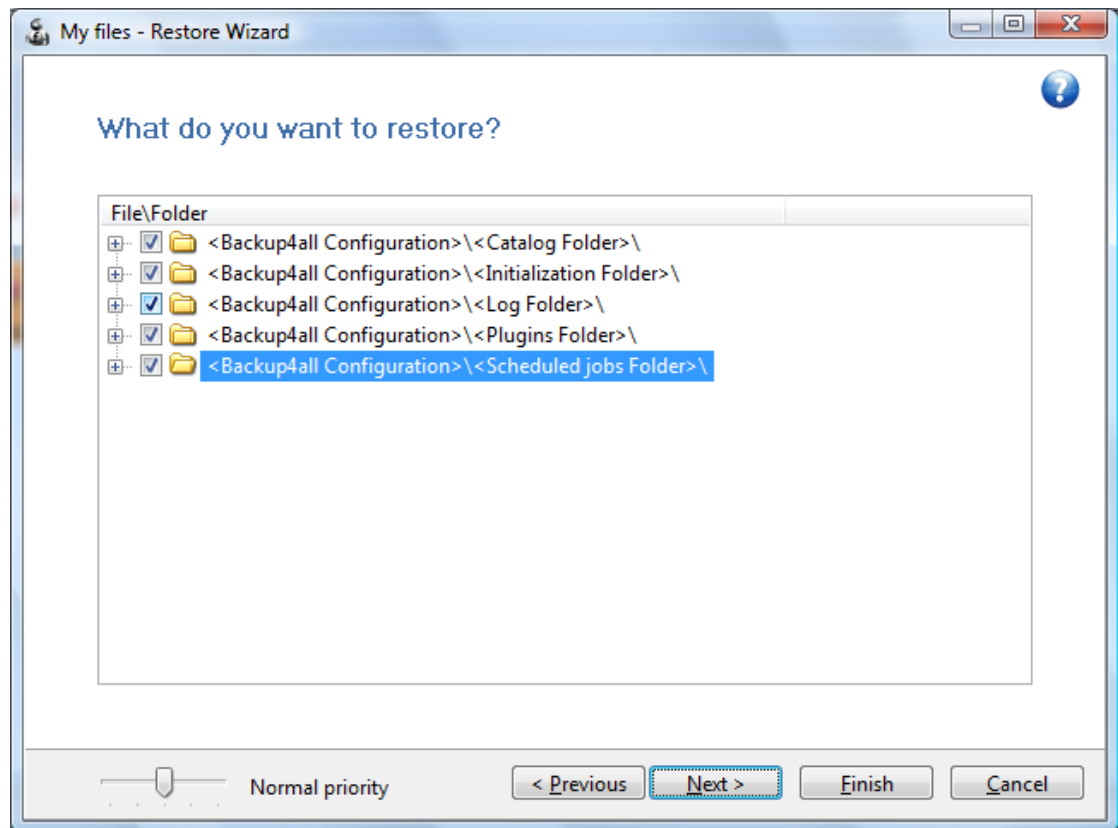

You can uncheck the files you don't want to restore. By default, all files are checked.

Information provided for each file:

- **File/Folder** - Name of the file/folder
- **Size** - Size of the the file
- **Modified** - Date and time when the file version was last modified (at backup execution)
- **Backup no.** - The last backup number containing the file

The file versions in the list can be sorted by clicking on the column headers. The right-click menu on the column header provides a handy way to show/hide unnecessary columns (except the **File/Folder** column which is grayed out).

### 7.3 Do you want to filter the files


This is the third step of the **Restore Wizard** for **Choose/filter files and restore the latest version** restore type. You can filter the files to be restored.

Its behavior is the same as the **Filters** page of the **New Backup Wizard** or the **Backup Properties** window, except that the process is restore and not backup.

The **Filters** page defines files filters to be applied to files that are going to be restored. Only files and folders that match the filters will be restored.

You can add include or exclude filters. By default all files are included in the list to be restored.



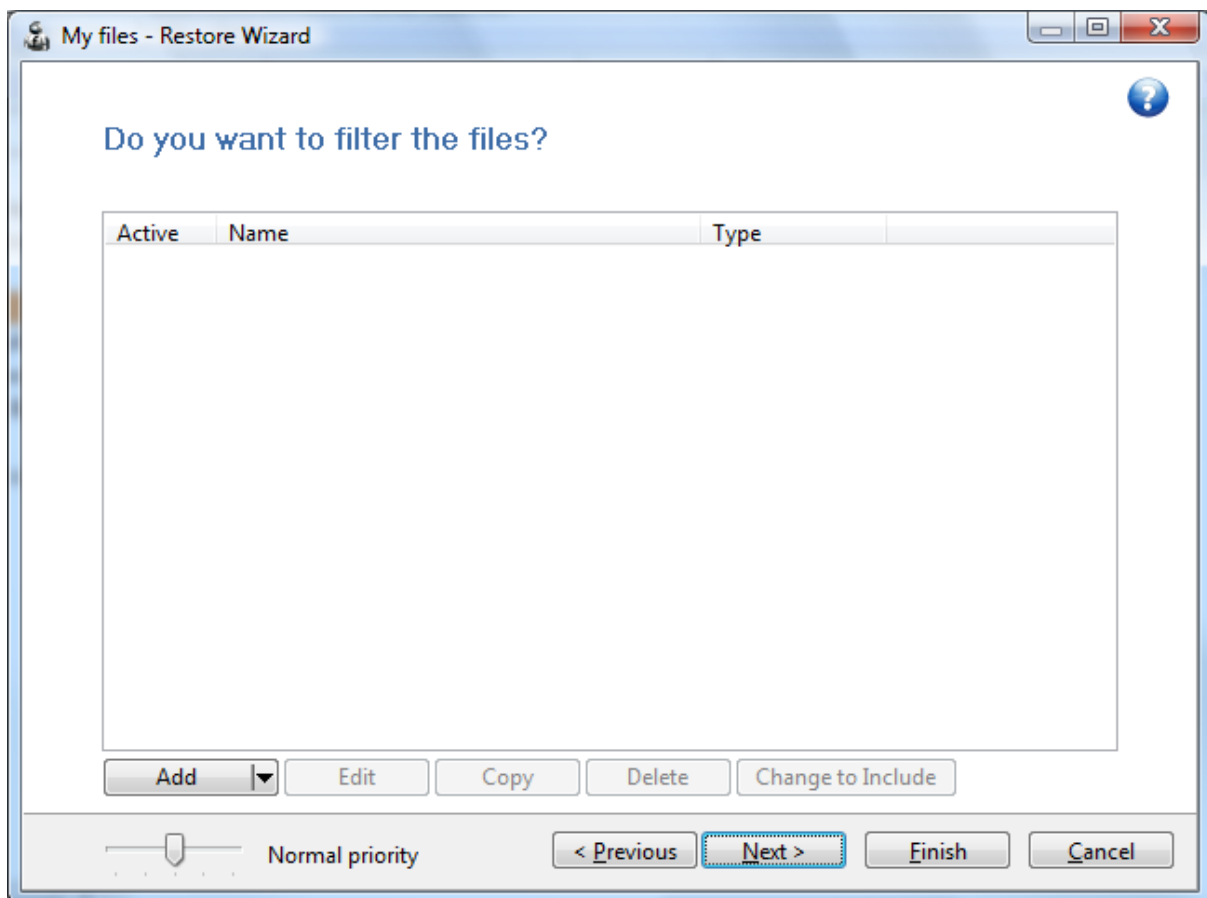

The system selects only files that match the include filter and do not match the exclude filter. This means the exclude filter is more powerful: if a file satisfies both include and exclude filters, it will not be processed by the system.

Include and exclude filters are composed from filter restrictions:

- two or more filter restrictions in the include filter means that a file must satisfy at least one restriction to be restored.
- two or more filter restrictions in the exclude filter means that a file must satisfy any restriction to be excluded.

In the **Type** column you can see if the filter is for include or exclude. To change the filter type, press the "Change to Include" or "Change to Exclude" button.

You can manage filter restrictions using the buttons:

- **Add include** - this will open a new window from where you can add a new restriction to the list of include filters.
- **Add exclude** - this will open a new window from where you can add a new restriction to the list of exclude filters.
- **Edit** - will open the same window as **Add**, with the selected filter's properties. You will be able to modify the selected restriction.
- **Copy** - will create a copy of the selected filter.
- **Delete** - will delete the selected filter from the list.

## File Filtering

**Part**

**VIII**

## 8 File Filtering

### 8.1 Overview

File filtering in FBackup provides an intuitive way to define what files and folders to back up or restore.

#### **Select Folders and Files for filtering**

The files can be filtered when added to backup. On the Backup Properties->Sources page each file and folder is shown in the tree with a checkbox in front of it. If you uncheck it, the file or folder will be excluded from the backup or restore process.

After applying filters, each file and folder is shown in the tree with a checkbox in front of it. If you uncheck it, the file or folder will be excluded from the backup or restore process.

#### **Filter**

The role of the filter is to restrict the files from the sources or destination that will participate in the backup or restore process. The filter actually consists of two filters: the include filter and the exclude filter.

**Include** filter shows which files will be included in the backup or restore process. If the filter type is "Include", it means the files which match the filter will be included in backup.

**Exclude** filter shows the files that will be excluded from the backup or restore. If the filter type is "Exclude", it means the files which match the filter will be excluded from backup.

You can change the filter type from Include to Exclude or from Exclude to Include if you press the "Change to Include"/"Change to Exclude" button. If no filters are defined, then all the files and folders from sources will be backed up or restored.

### 8.2 File Filter

The **Edit file filter item** window is shown every time a file filter restriction is added or modified. It can be opened by pressing the **Add** button from the **Filters** page (New Backup Wizard, Backup Properties, Restore Wizard window or Tools->Options) or the **Edit** button (if filters are already defined).

The screenshot shows a dialog box titled "Edit file filter item". It has two tabs: "General" and "File name". The "General" tab is active, showing a "Filter name" field with the text "New filter configuration". The "File name" tab is also visible, showing a checkbox labeled "Enable" which is unchecked, followed by a large empty text area. To the right of the text area are three buttons: "Add", "Edit", and "Delete".

### **General**

In the **Filter name** field you can type the name of the created filter. By default, the "New filter configuration" name is assigned. If you use an existing filter, the name of that filter is used.

### **File name**

Enabling this will allow defining filters based on file name pattern.

Press **Add** and select an existing file extension from the **Filter** combo (\*.doc, \*.pdf, \*.zip etc.). If the extension does not exist in the combo, just type it in and press OK. You can use the **Edit** or **Delete** buttons to modify/remove the file name filters defined.

**File name patterns** can include:

- **\*** - it matches one or more letters. For example **a\*.doc** matches all files that start with **a** and have **.doc** extension
- **?** - it matches only one letter. For example **a\*.do?** matches all files that start with **a** and have any extension composed of three letters, the first two being **do**

**Options**

**Part**

---




**IX**

## 9 Options

### 9.1 General

The **General** page of the **Options** window (accessible from the Tools, Options menu item) contains general settings of the program.

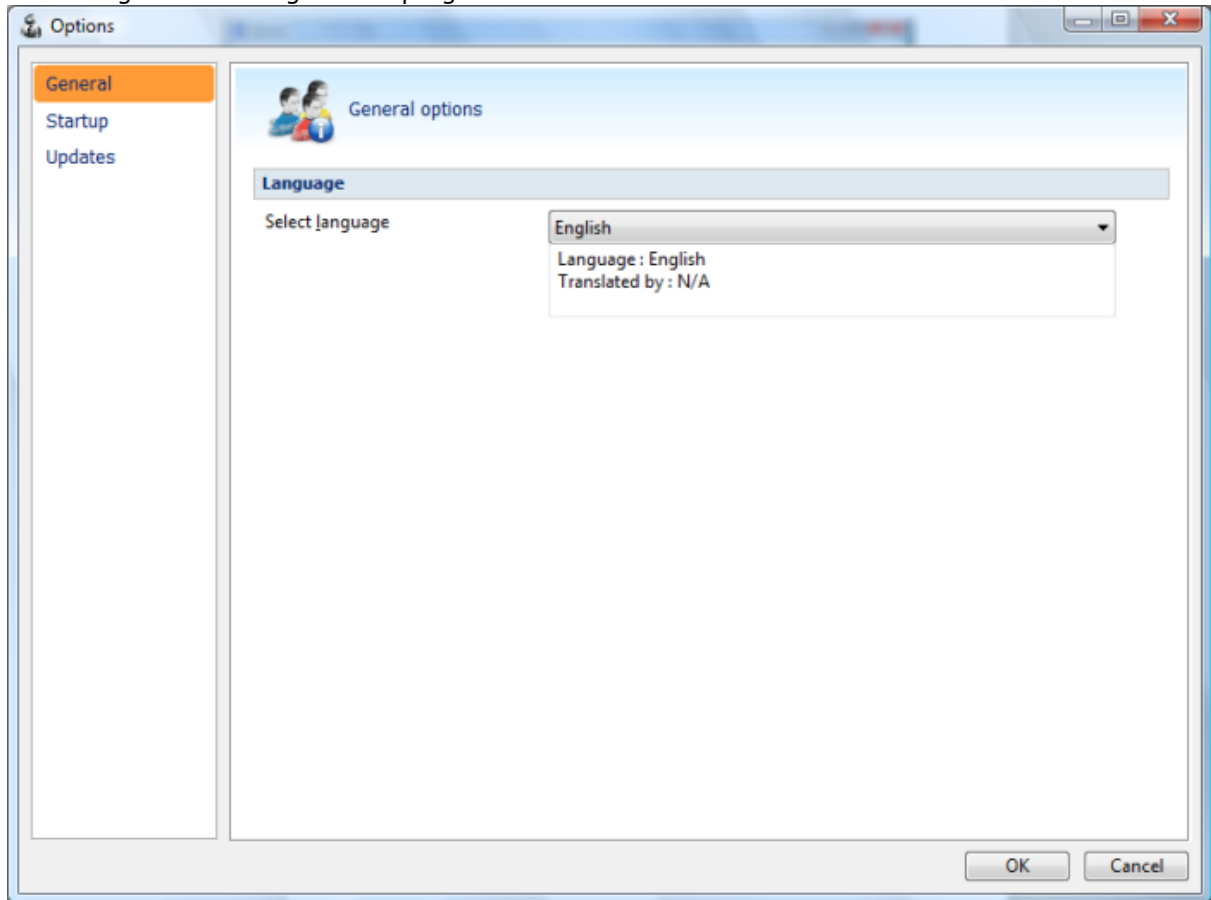


#### Language

In the **Language** section you can select the language of the program interface by choosing another one from the drop down list. Only the languages that were installed with the program are displayed. The language of the interface changes only after the **Options** window is closed by pressing the **OK** button. The selected language is kept as long as you don't change it or it becomes invalid due to software updates.

The text box below the **Language** field shows details about the selected language (like translator name and contact information).

### 9.2 Startup

The **Startup** page of the **Options** window (accessible from the Tools, Options menu item) contains startup related settings of the program.

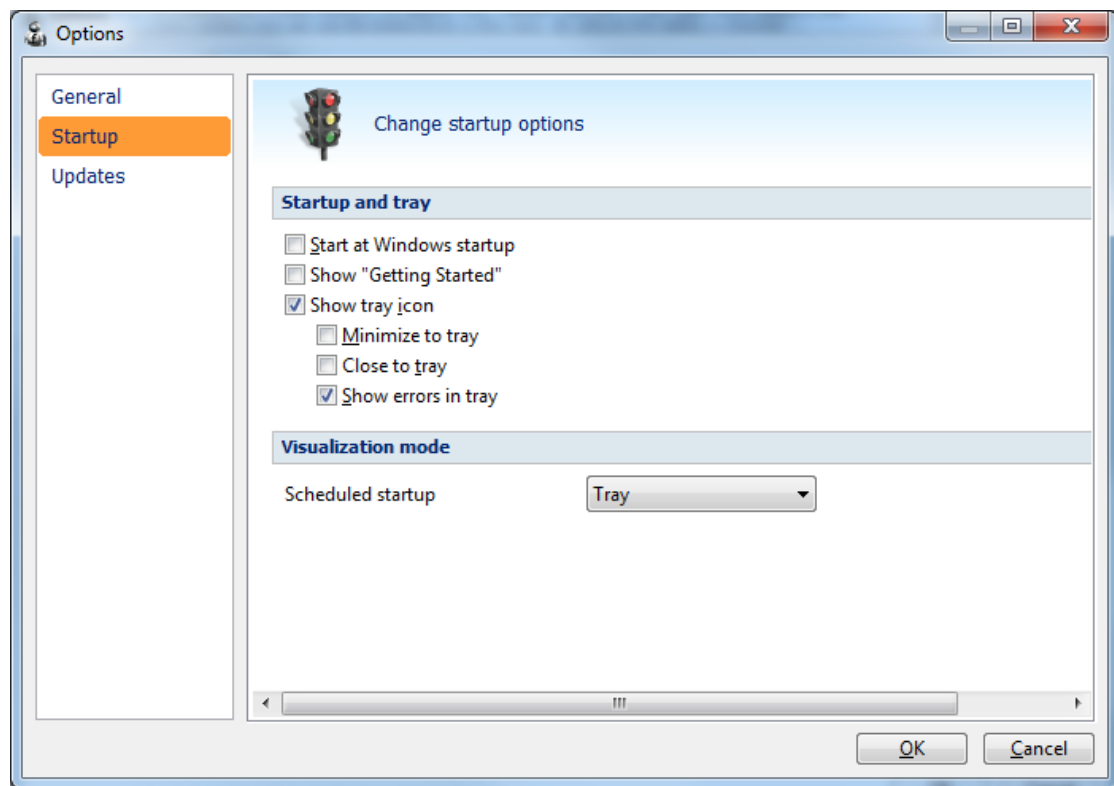

### **Startup and tray**

#### **Start at Windows startup**

If checked the program is started when Windows starts. By default this option is not checked.

#### **Show "Getting Started"**

If checked, the "Getting Started" window is displayed when you start FBackup.

#### **Show tray icon**

If checked the program icon is displayed in the Taskbar Notification Area.

**Minimize to tray** - Check this option if you want to show FBackup in the taskbar tray when the application is minimized. If unchecked, the application is minimized normally to the Windows taskbar. By default this option is not checked

**Close to tray** - Check this option if you want to show FBackup in the taskbar tray even when you close it from the **File->Exit** menu or the title bar close button. If unchecked, FBackup will terminate when you exit the application. By default this option is not checked


**Show errors in tray** - The error icon appears when the application is minimized to tray and a backup had errors. The error icon will blink over the default FBackup tray icon. Uncheck this option if you do not want to see the error icon in the tray. By default this option is checked.

### **Visualization mode**

**Scheduled Startup** - You can select the way FBackup's main window will be displayed when a scheduled backup starts it. The options are: Last window state, Minimized, Normal, Maximized and Tray (if the Show tray icon option is checked).

## 9.3 Updates

On the **Updates** page of the **Options** window (accessible from the Tools, Options menu item) you can configure FBackup when to check for updates.

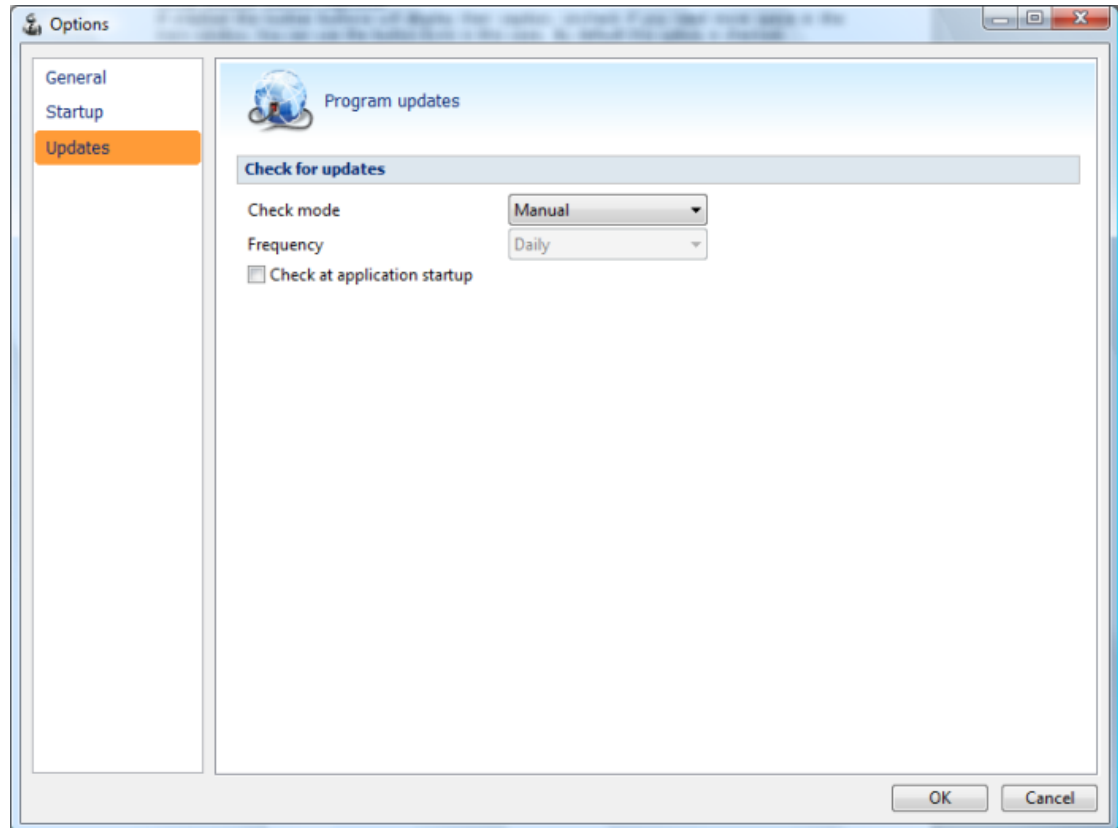

### Check for updates

#### Check mode

User can choose one of these modes:

- **Manual** - user will manually check for new updates. This option is selected by default.
- **Reminder** - the program will remind you with the selected frequency to check for new updates
- **Automatically** - the program will automatically check for new updates with the selected frequency.

#### Frequency

User can set the frequency for FBackup to remind or to automatically check for new updates.

#### Check at application startup

If checked, the program will check for new updates at application startup.



**Help**


**Part**

---



## 10 Help

### 10.1 Check for Updates

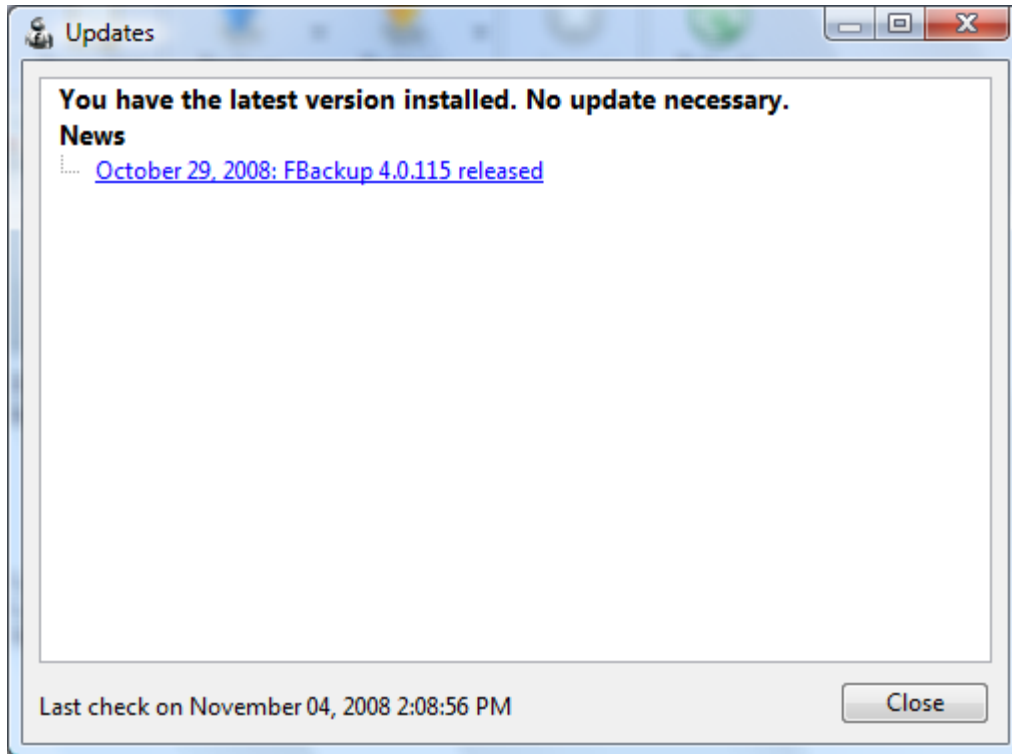

You can manually check for updates from **Help** -> **Check for Updates**.

In the **Upgrade** window, you can see if there are any updates available and what is new in the update.

### 10.2 About

The About page of FBackup contains information about the version and edition you have installed

# Index

## - A -

Abort backup 48  
Advanced mode 35  
Archive bit 47

## - B -

Backup 18  
Backup list 21  
Backup Properties destination 36  
Backup Properties overview 35  
Backup properties sources 41  
Backup to USB drives 13  
backup type 31, 43  
Backup types  
    Differential backup 16  
    Full backup 16  
    Incremental backup 16  
    Mirror backup 16  
Backup wizard destination 27, 28, 29  
Backup wizard general 35  
Backup wizard name 27  
Backup wizard overview 27  
Backup wizard what to backup 30  
Blank passwords 50

## - C -

Cancel 18  
CD drive 36  
Change criteria 47  
Change Icon 35  
Clear archive bit 43  
Clear backup 50  
Collapse 18  
Commands 18  
Comparison criteria 47  
Configure new backup 9  
Copy 18  
Create a new backup 9  
Create like 18  
Create shortcut 22

## - D -

Delete 18  
Delete group 18  
Delete sources 47  
Description 6  
Differential 16, 43  
Differential backup 31  
Drive letter folder 54

## - E -

Empty directories 47  
Enclosures 13  
Encryption  
    AES encryption 12  
    Zip encryption 12  
Erase disc 50  
Exclude 59  
Execute backup 10  
Exit 18  
Expand 18  
Explore 18  
External device 13

## - F -

Fast mirror 44  
FBackup 6  
FBackup Configurations 35  
File filtering 59  
Filter  
    By attribute 59  
    By date 59  
    By name 59  
    By size 59  
    Directories 59  
    Files 59  
    Folders 59  
Filter backup  
    Customize filter 42  
    Exclude files 42  
    Include files 42  
    Main filter 42  
Filter restore  
    Customize filter 56

Filter restore  
    Exclude files 56  
    Include files 56  
    Main filter 56  
Firewire 13, 38  
flash 38  
floppy 38  
Floppy drive 36  
Folder filtering 59  
FTP 27, 36  
Full 16, 43  
Full backup 31, 44

## - G -

General options  
    Align caption 62  
    Appearance 62  
    Background color 62  
    Blank passwords 62  
    Captions 62  
    Context menu 62  
    Daylight saving 62  
    Explorer icons 62  
    Hidden files 62  
    Hide empty folders 62  
    Hint 62  
    Icon size 62  
    Insecure passwords 62  
    Measurement 62  
    Sort backups 62  
    Toolbar 62  
Getting Started  
    Backup 20  
    New 20  
    Open 20  
    Restore 20  
Group 35

## - H -

Hard disk drive 36

## - I -

Import 18  
Include 59

Incremental 16, 43  
Incremental backup 31  
Introduction 6

## - K -

Keyboard shortcuts 25

## - L -

Labeling 47  
LAN 27, 29, 36, 40  
Legacy 47  
Local catalog 47  
Local destination 37  
Local drives 27, 28, 36

## - M -

Make 18  
Make differential 18  
Make full 18  
Make incremental 18  
Manage backup jobs  
    Copy backup 11  
    Delete backup 11  
    Modify backup 11  
Manage plugins 24, 30  
Mapped network drive 36  
Mirror 16, 43  
Mirror backup 31, 44  
Mirror with zip 44  
My Documents 35  
My Pictures 35

## - N -

Name 35  
New 18  
New backup 9  
New backup wizard  
    Advanced 9  
    Destination 9  
    Explore 9  
    Filters 9  
    General 9  
    Scheduler 9

## New backup wizard

- Sources 9
- Statistics 9
- Summary 9
- Type 9

New group 18

NTFS 47

**- O -**

Open backup 18

Open files 47

Outlook Express 35

Override catalog 36

Override filter 42, 56, 59

**- P -**

Password 12

Password protect a backup 12

Portability 13

Predefined backup 24, 30, 35

Product description 6

Properties 18

**- R -**

Refresh 18

removable 38

Remove password 12

Rename group 18

Restore 18

Advanced 54

Basic 54

Full 54

Restore latest version 11

Restore to 11

Restore wizard 11

Standard 54

Restore from a backup 11

Restrictions 42, 56

Run a backup job 10

Run at shutdown 50

Run backup 10

Running 18

**- S -**

Save storage space 16

Schedule 32

Add 48

Close window 50

Command line 50

Delete 48

Edit 48

Hide window 50

Main application 50

Schedule 48

Schedule a backup 12

Scheduler 18

Standalone scheduler 12

Task scheduler 12

Shortcut 22

Show deleted 18

Show excluded 18

Show modified 18

Show new 18

Show unchanged 18

Sources

Abort 30, 41

Add files 30, 41

Add folder 30, 41

Ignore 30, 41

Remove 30, 41

Retry 30, 41

Standalone scheduler 48, 50

Start backup 10

Startup options

Windows startup 62

Statistics 18

Summary 18, 55

System requirements 7

**- T -**

Task 48

Test 18, 47

Toolbar 18

Tray icon

Close 62

Minimize 62

Show errors 62

Type full 44  
Type mirror 44

## - U -

UNC network drive 36  
usb 38  
USB backup  
    Detect device 13  
    Format device 13  
    One Touch Backup 13  
    Start device 13  
USB drive 13, 36

## - V -

Visualization  
    Maximized 62  
    Window state 62  
Volume Shadow Copy 47

## - W -

Windows 2000 7  
Windows 2003 Server 7  
Windows 98 SE 7  
Windows Me 7  
Windows NT SP6 7  
Windows scheduler 48, 50  
Windows XP 7  
Wizard 27, 35

## - Z -

Zip backup 44  
Zip compression 46  
Zip drive 36  
Zip encryption 46